



Structural Shapes

April 2023

This catalog contains the information you need for ordering structural shapes from Nucor-Yamato Steel Company. All other catalogs are superceded. This catalog also contains information on the dimensions and properties of various shapes produced by Nucor-Yamato Steel Company. Other supplementary data may be included. The use of all data contained in this catalog should be used with qualified professional judgement.

Nucor-Yamato Steel Company is a joint venture company of Nucor Corporation and Yamato Kogyo Company, Ltd. All Nucor-Yamato Steel Company structural products are melted and manufactured in the United States near Blytheville, Arkansas.

Nucor-Yamato Steel Company
P. O. Box 1228
Blytheville, Arkansas 72316

General Office: 870/762-5500
Sales: 800/289-6977
FAX: 870/763-9107

Shipping Address:
Nucor-Yamato Steel Company
Highway 18 East
Armored, Arkansas 72310

Nucor Corporation
1915 Rexford Road
Charlotte, North Carolina 28211

Yamato Kogyo Company, Ltd.
P. O. Box 8 Hirohata
380 Kibi
Otsu-ku
Himeji City
Hyogo Pref., Japan

General Data contained within this catalog is current as of April 2023, however, revisions of this catalog, in whole or in part, may be issued in the future.

This catalog or any part thereof may be reproduced without permission provided that the reproduced pages, or portions of pages, are clearly marked and identified with the latest revision date and with Nucor-Yamato Steel Company as the source.

The information contained within this catalog has been prepared in accordance with recognized engineering principles and is for general information only. While it is believed to be accurate, this information should be used only when supplemented by competent and qualified professional judgment. Anyone making use of this information assumes all liability arising from such use.

The wide flange (W) beams and H-piles (HP) listed in this catalog are rolled at specific intervals determined by Nucor-Yamato Steel Company. Some shapes are rolled less frequently than others. Contact Nucor-Yamato Steel Company or refer to the regularly published Proposed Rolling Schedule to determine the current rolling frequency. Information is available on the Nucor-Yamato Steel website, www.nucoryamato.com.

Our structural shapes conform to ASTM (American Society for Testing and Materials) A6/A6M structural steel specifications, latest edition. However, we may furnish steel conforming to other specifications by special request. Contact us for product availability, rolling frequency and other pertinent information.

In regards to rolling and cutting tolerances, they are in accordance with accepted standards.

Concerning W and HP shapes, the inside and outside surfaces of the flanges are parallel to each other. The inside flange surfaces of S and C shapes have approximately a 16-2/3 % slope. The slope of the inside flange surfaces of MC shapes varies.

Nomenclature We use the standard AISI (American Iron and Steel Institute) nomenclature throughout the catalog. For example, W24x55, C15x40, MC12x45, and HP12x53. Please use this type of notation when placing your order.

Weights, Dimensions And Properties We compute the weights of rolled steel shapes on the basis that a cubic foot of steel weighs 490 pounds and a cubic meter of steel has a mass of 7850 kilograms. The weights of the shapes have been calculated from their theoretical dimensions as published in ASTM A6/A6M, and are rounded off to the nearest pound, except where we have otherwise indicated. In accordance with standard industry practices, the fillets and/or the rounded edges have been included in our computation of the weights and properties. In accordance with ASTM A6/A6M, the cross-sectional area or weight (mass) of each shape shall not vary more than 2.5% from theoretical or specified amounts, except for shapes with a nominal weight of less than 100 lb/ft, in which variation shall range from -2.5% to 3.0% from the theoretical cross section area or specified nominal weight. The cross-sectional area values listed are as published, except where no publication of such values could be found. These values are calculated based upon nominal dimensions and are indicated with an asterisk. This catalog contains both inch-pound and SI metric units for dimensions and properties of shapes produced by Nucor-Yamato Steel Company.

Rolling Practice and Rolling Tolerances Universal mills are used for rolling W, S, C, MC, S, L and HP shapes. The thickness of the flange and the web may be changed with corresponding changes in the beam depth and flange width. The thickness of the web may be changed with a corresponding change in the flange width. All other dimensions remain unchanged.

In the production of structural shapes, the dimensions and weights may vary slightly from the published nominal figures. However, they remain within the permissible tolerance.

Roll wear may also slightly affect the radii of fillets and rounded edges. So please make proper allowances for fittings and connections.

Roll wear, along with deformation in the mill and the plasticity of hot steel may also cause variations from the published dimensions of rolled structural shapes. Therefore, to meet camber or sweep tolerances, they may need straightening by the producer. Other tolerances are subject to negotiation with Nucor-Yamato Steel Company.

Nucor-Yamato Steel Company produces steel to tolerances provided by ASTM A6 most recent revision. Column tolerances applies to camber and sweep on following sections when specified at the time of order entry as columns:

W8x8 (31 lbs/ft to 67 lbs/ft)

W10x10 (49 lbs/ft to 112 lbs/ft)

W12x12 (65 lbs/ft to 336 lbs/ft)

W14x14 ½ (90 lbs/ft to 132 lbs/ft)

W14x16 (145 lbs/ft to 808 lbs/ft)

HP16x16 (88 lbs/ft to 183 lbs/ft)

HP18x18 (135 lbs/ft to 204 lbs/ft)

Surface Finishes And Conditioning Surface imperfections on the finished product are caused by a number of factors. However, they are generally of minor importance and have no effect on the end use.

Fins or burrs are common with commercial sawing or shearing. And the presence of grease, oil, mill scale or rust is unavoidable. It is a natural occurrence in the rolling and storing of all structural shapes.

Our products may be conditioned in accordance with ASTM Specification A6/A6M, latest edition.

Symbols

A	Cross sectional area, square inches or square millimeters
E	Modulus of Elasticity, 29,000 kips per square inch or 200 000 Newtons per square millimeter (N/mm ²)
I	Moment of inertia (X & Y axis), inches ⁴ or millimeters ⁴
R	Radius of fillet, inches or millimeters
S	Elastic section modulus (X & Y axis), inches ³ or millimeters ³
a	Distance from web face to edge of flange, inches or millimeters
b _f	Flange width, inches or millimeters
d	Depth of flange, inches or millimeters
k	Distance from outside of flange face to intersection of fillet with webs, inches or millimeters
k ₁	Distance from center line of web to intersection of fillet with flange, inches or millimeters
r	Radius of gyration (X & Y axis), inches or millimeters
t _f	(W and HP shapes) Flange thickness, inches or millimeters (C, MC, S, & L shapes) Average flange thickness, inches or millimeters
t _w	Web thickness, inches or millimeters

Symbol & Dimension Notes

Decimal dimensions for b_f , d , t_f , and t_w are in accordance with those listed in ASTM A6/A6M. The method used to determine the approximate dimensions T , k , and k_1 , is in accordance with the American Institute of Steel Construction (AISC). The fillet radius used in calculating T , k and k_1 is the theoretical radius used by Nucor-Yamato Steel Company and may vary from those of other producers. The method of rounding each value is as follows:

- a (W, HP, & S shapes) Projection of the flange beyond the face of the web, which equals one-half flange width minus one-half web thickness, rounded to the nearest 0.001 inch or 0.1 millimeter
- (C & MC shapes) Projection of the flange beyond the face of the web, which equals the flange width minus the web thickness, rounded to the nearest 0.001 inch or 0.1 millimeter
- b_f Flange width, rounded to the nearest 0.001 inch or 1 millimeter
- d Depth of section, rounded to the nearest 0.01 inch or 1 millimeter
- t_f, t_w Flange and web thicknesses, rounded to the nearest 0.001 inch or 0.1 millimeter
- T (W & HP shapes) Clear distance on web between fillets which equals (depth minus the ASTM A6/A6M maximum allowable under-tolerance) minus two times (flange thickness plus fillet radius), rounded to the nearest 0.001 inch or 0.1 millimeter
(C, MC, S, & L shapes) Clear distance on web between fillets which equals (depth minus ASTM A6/A6M maximum allowable under-tolerance) minus two times [flange thickness at heel plus fillet radius times the tangent of one-half times (90° minus the flange slope, θ)], rounded to the nearest 0.001 inch or 0.1 millimeter
- k Distance from the outside of the flange to the toe of the fillet on the web which equals one-half (depth minus T distance), rounded to the nearest 0.001 inch or 0.1 millimeter
- k_1 (W & HP shapes only) Distance from the center of the web to the toe of the fillet on the flange which equals (one-half web thickness plus the fillet radius), rounded to the nearest 0.001 inch or 0.1 millimeters

Available grades:

ASTM:

ASTM A 36/A 36M
ASTM A 328/A 328M
ASTM A 572/A 572M Grades 50, 60*, and 65*
ASTM A 588/A 588M Grade B
ASTM A 690/A 690M
ASTM A 709/A 709M Grades 50, 50S, 50W, QST 50, QST 50S, QST 65, QST 70
ASTM A 913/ A 913M Grades 50, 65, 70, and 80
ASTM A 992/ A 992M

ABS:

ABS Grade A
ABS Grade B
ABS Grade AH32
ABS Grade AH36

BRITISH / EUROPEAN*:

EN10204:2004, Grade EN10025/S355 JO
EN10204:2004, Grade EN10025/S355 JR
EN10204:2004, Grade EN10025/S355 J2

AASHTO:

AASHTO M 270M/M 270

CANADIAN:

CSA G40.21 50A (350A)
CSA G40.21 50AT (350AT)
CSA G40.21 50W (345WM)
CSA G40.21 50WT (345WMT)

*Only on certain sections

**NUCOR-YAMATO STEEL COMPANY**

A6 Section Size	A6M Section Size (metric)
W44 x 408	W1100 x 607
W44 x 368	W1100 x 548
W44 x 335	W1100 x 499
W44 x 290	W1100 x 433
W44 x 262	W1100 x 390
W44 x 230	W1100 x 343
W40 x 655	W1000 x 976
W40 x 593	W1000 x 883
W40 x 503	W1000 x 748
W40 x 431	W1000 x 642
W40 x 397	W1000 x 591
W40 x 372	W1000 x 554
W40 x 362	W1000 x 539
W40 x 324	W1000 x 483
W40 x 297	W1000 x 443
W40 x 277	W1000 x 412
W40 x 249	W1000 x 371
W40 x 215	W1000 x 321
W40 x 199	W1000 x 296
W40 x 392	W1000 x 584
W40 x 327	W1000 x 486
W40 x 294	W1000 x 438
W40 x 278	W1000 x 415
W40 x 264	W1000 x 393
W40 x 235	W1000 x 350
W40 x 211	W1000 x 314
W40 x 183	W1000 x 272
W40 x 167	W1000 x 249
W40 x 149	W1000 x 222
W36 x 652	W920 x 970
W36 x 529	W920 x 787
W36 x 487	W920 x 725
W36 x 441	W920 x 656
W36 x 395	W920 x 588
W36 x 361	W920 x 537
W36 x 330	W920 x 491
W36 x 302	W920 x 449
W36 x 282	W920 x 420
W36 x 262	W920 x 390
W36 x 247	W920 x 368
W36 x 231	W920 x 344

A6 Section Size	A6M Section Size (metric)
W36 x 256	W920 x 381
W36 x 232	W920 x 345
W36 x 210	W920 x 313
W36 x 194	W920 x 289
W36 x 182	W920 x 271
W36 x 170	W920 x 253
W36 x 160	W920 x 238
W36 x 150	W920 x 223
W36 x 135	W920 x 201
W33 x 387	W840 x 576
W33 x 354	W840 x 527
W33 x 318	W840 x 473
W33 x 291	W840 x 433
W33 x 263	W840 x 392
W33 x 241	W840 x 359
W33 x 221	W840 x 329
W33 x 201	W840 x 299
W33 x 169	W840 x 251
W33 x 152	W840 x 226
W33 x 141	W840 x 210
W33 x 130	W840 x 193
W33 x 118	W840 x 176
W30 x 433	W760 x 644
W30 x 391	W760 x 582
W30 x 357	W760 x 531
W30 x 326	W760 x 484
W30 x 292	W760 x 434
W30 x 261	W760 x 389
W30 x 235	W760 x 350
W30 x 211	W760 x 314
W30 x 191	W760 x 284
W30 x 173	W760 x 257
W30 x 148	W760 x 220
W30 x 132	W760 x 196
W30 x 124	W760 x 185
W30 x 116	W760 x 173
W30 x 108	W760 x 161
W30 x 99	W760 x 147
W30 x 90	W760 x 134

A6 Section Size	A6M Section Size (metric)
W27 x 539	W690 x 802
W27 x 368	W690 x 548
W27 x 336	W690 x 500
W27 x 307	W690 x 457
W27 x 281	W690 x 419
W27 x 258	W690 x 384
W27 x 235	W690 x 350
W27 x 217	W690 x 323
W27 x 194	W690 x 289
W27 x 178	W690 x 265
W27 x 161	W690 x 240
W27 x 146	W690 x 217
W27 x 129	W690 x 192
W27 x 114	W690 x 170
W27 x 102	W690 x 152
W27 x 94	W690 x 140
W27 x 84	W690 x 125
W24 x 370	W610 x 551
W24 x 335	W610 x 498
W24 x 306	W610 x 455
W24 x 279	W610 x 415
W24 x 250	W610 x 372
W24 x 229	W610 x 341
W24 x 207	W610 x 307
W24 x 192	W610 x 285
W24 x 176	W610 x 262
W24 x 162	W610 x 241
W24 x 146	W610 x 217
W24 x 131	W610 x 195
W24 x 117	W610 x 174
W24 x 104	W610 x 155
W24 x 103	W610 x 153
W24 x 94	W610 x 140
W24 x 84	W610 x 125
W24 x 76	W610 x 113
W24 x 68	W610 x 101
W24 x 61*	W610 x 91*
W24 x 56*	W610 x 84*
W24 x 62	W610 x 92
W24 x 55	W610 x 82

* CSA

**NUCOR-YAMATO STEEL COMPANY**

A6 Section Size	A6M Section Size (metric)
W21 x 275	W530 x 409
W21 x 248	W530 x 369
W21 x 223	W530 x 332
W21 x 201	W530 x 300
W21 x 182	W530 x 272
W21 x 166	W530 x 248
W21 x 147	W530 x 219
W21 x 132	W530 x 196
W21 x 122	W530 x 182
W21 x 111	W530 x 165
W21 x 101	W530 x 150
W21 x 93	W530 x 138
W21 x 83	W530 x 123
W21 x 73	W530 x 109
W21 x 68	W530 x 101
W21 x 62	W530 x 92
W21 x 55	W530 x 82
W21 x 48	W530 x 72
W21 x 57	W530 x 85
W21 x 50	W530 x 74
W21 x 44	W530 x 66
W18 x 311	W460 x 464
W18 x 283	W460 x 421
W18 x 258	W460 x 384
W18 x 234	W460 x 348
W18 x 211	W460 x 314
W18 x 192	W460 x 286
W18 x 175	W460 x 260
W18 x 158	W460 x 235
W18 x 143	W460 x 213
W18 x 130	W460 x 193
W18 x 119	W460 x 177
W18 x 106	W460 x 158
W18 x 97	W460 x 144
W18 x 86	W460 x 128
W18 x 76	W460 x 113
W18 x 71	W460 x 106
W18 x 65	W460 x 97
W18 x 60	W460 x 89
W18 x 55	W460 x 82
W18 x 50	W460 x 74
W18 x 45*	W460 x 67*
W18 x 41*	W460 x 61*

A6 Section Size	A6M Section Size (metric)
W18 x 46	W460 x 68
W18 x 40	W460 x 60
W18 x 35	W460 x 52
W16 x 100	W410 x 149
W16 x 89	W410 x 132
W16 x 77	W410 x 114
W16 x 67	W410 x 100
W16 x 57	W410 x 85
W16 x 50	W410 x 75
W16 x 45	W410 x 67
W16 x 40	W410 x 60
W16 x 36	W410 x 53
W16 x 31	W410 x 46.1
W16 x 26	W410 x 38.8
W14 x 808	W360 x 1202
W14 x 730	W360 x 1086
W14 x 665	W360 x 990
W14 x 605	W360 x 900
W14 x 550	W360 x 818
W14 x 500	W360 x 744
W14 x 455	W360 x 677
W14 x 426	W360 x 634
W14 x 398	W360 x 592
W14 x 370	W360 x 551
W14 x 342	W360 x 509
W14 x 311	W360 x 463
W14 x 283	W360 x 421
W14 x 257	W360 x 382
W14 x 233	W360 x 347
W14 x 211	W360 x 314
W14 x 193	W360 x 287
W14 x 176	W360 x 262
W14 x 159	W360 x 237
W14 x 145	W360 x 216
W14 x 132	W360 x 196
W14 x 120	W360 x 179
W14 x 109	W360 x 162
W14 x 99	W360 x 147
W14 x 90	W360 x 134

A6 Section Size	A6M Section Size (metric)
W14 x 82	W360 x 122
W14 x 74	W360 x 110
W14 x 68	W360 x 101
W14 x 61	W360 x 91
W14 x 53	W360 x 79
W14 x 48	W360 x 72
W14 x 43	W360 x 64
W14 x 38	W360 x 57.8
W14 x 34	W360 x 51
W14 x 30	W360 x 44
W14 x 26	W360 x 39
W14 x 22	W360 x 32.9
W12 x 336	W310 x 500
W12 x 305	W310 x 454
W12 x 279	W310 x 415
W12 x 252	W310 x 375
W12 x 230	W310 x 342
W12 x 210	W310 x 313
W12 x 190	W310 x 283
W12 x 170	W310 x 253
W12 x 152	W310 x 226
W12 x 136	W310 x 202
W12 x 120	W310 x 179
W12 x 106	W310 x 158
W12 x 96	W310 x 143
W12 x 87	W310 x 129
W12 x 79	W310 x 117
W12 x 72	W310 x 107
W12 x 65	W310 x 97
W12 x 58	W310 x 86
W12 x 53	W310 x 79
W12 x 50	W310 x 74
W12 x 45	W310 x 67
W12 x 40	W310 x 60
W12 x 35	W310 x 52
W12 x 30	W310 x 44.5
W12 x 26	W310 x 38.7
W12 x 22	W310 x 32.7
W12 x 19	W310 x 28.3
W12 x 16	W310 x 23.8

* CSA


**NUCOR-YAMATO STEEL COMPANY**

A6 Section Size	A6M Section Size (metric)
W10 x 112	W250 x 167
W10 x 100	W250 x 149
W10 x 88	W250 x 131
W10 x 77	W250 x 115
W10 x 68	W250 x 101
W10 x 60	W250 x 89
W10 x 54	W250 x 80
W10 x 49	W250 x 73
W10 x 45	W250 x 67
W10 x 39	W250 x 58
W10 x 33	W250 x 49.1
W10 x 30	W250 x 44.8
W10 x 26	W250 x 38.5
W10 x 22	W250 x 32.7
W8 x 67	W200 x 100
W8 x 58	W200 x 86
W8 x 48	W200 x 71
W8 x 40	W200 x 59
W8 x 35	W200 x 52
W8 x 31	W200 x 46.1
W8 x 28	W200 x 41.7
W8 x 24	W200 x 35.9
W8 x 21	W200 x 31.3
W8 x 18	W200 x 26.6
W6 x 25	W150 x 37.1
W6 x 20	W150 x 29.8
W6 x 15	W150 x 22.5
HP18 x 204	HP460 x 304
HP18 x 181	HP460 x 269
HP18 x 157	HP460 x 234
HP18 x 135	HP460 x 202

A6 Section Size	A6M Section Size (metric)
HP16 x 183	HP410 x 272
HP16 x 162	HP410 x 242
HP16 x 141	HP410 x 211
HP16 x 121	HP410 x 181
HP16 x 101	HP410 x 151
HP16 x 88	HP410 x 131
HP14 x 117	HP360 x 174
HP14 x 102	HP360 x 152
HP14 x 89	HP360 x 132
HP14 x 73	HP360 x 108
HP12 x 89	HP310 x 132
HP12 x 84	HP310 x 125
HP12 x 74	HP310 x 110
HP12 x 63	HP310 x 93
HP12 x 53	HP310 x 79
HP8 x 36	HP200 x 53
S24 x 121	S610 x 180
S24 x 106	S610 x 158
S24 x 100	S610 x 149
S24 x 90	S610 x 134
S24 x 80	S610 x 119
S20 x 96	S510 x 143
S20 x 86	S510 x 128
S20 x 75	S510 x 112
S20 x 66	S510 x 98
S18 x 70	S460 x 104
S18 x 54.7	S460 x 81.4
S15 x 50	S380 x 74
S15 x 42.9	S380 x 64
S12 x 50	S310 x 74
S12 x 40.8	S310 x 60.7
S12 x 35	S310 x 52
S12 x 31.8	S310 x 47.3

A6 Section Size	A6M Section Size (metric)
L8 x 8 x 1-1/8	L203 x 203 x 28.6
L8 x 8 x 1	L203 x 203 x 25.4
L8 x 8 x 7/8	L203 x 203 x 22.2
L8 x 8 x 3/4	L203 x 203 x 19.0
L8 x 8 x 5/8	L203 x 203 x 15.9
L8 x 8 x 9/16	L203 x 203 x 14.3
L8 x 8 x 1/2	L203 x 203 x 12.7
L8 x 6 x 1	L203 x 152 x 25.4
L8 x 6 x 7/8	L203 x 152 x 22.2
L8 x 6 x 3/4	L203 x 152 x 19.0
L8 x 6 x 5/8	L203 x 152 x 15.9
L8 x 6 x 9/16	L203 x 152 x 14.3
L8 x 6 x 1/2	L203 x 152 x 12.7
L8 x 4 x 1	L203 x 102 x 25.4
L8 x 4 x 7/8	L203 x 102 x 22.2
L8 x 4 x 3/4	L203 x 102 x 19.0
L8 x 4 x 5/8	L203 x 102 x 15.9
L8 x 4 x 9/16	L203 x 102 x 14.3
L8 x 4 x 1/2	L203 x 102 x 12.7
C15 x 50.0	C380 x 74
C15 x 40.0	C380 x 60
C15 x 33.9	C380 x 50.4
C12 x 30.0	C310 x 45
C12 x 25.0	C310 x 37
C12 x 20.7	C310 x 30.8
MC18 x 58.0	MC460 x 86
MC18 x 51.9	MC460 x 77.2
MC18 x 45.8	MC460 x 68.2
MC18 x 42.7	MC460 x 63.5
MC13 x 50.0	MC330 x 74
MC13 x 40.0	MC330 x 60
MC13 x 35.0	MC330 x 52
MC13 x 31.8	MC330 x 47.3
MC12 x 50.0	MC310 x 74
MC12 x 45.0	MC310 x 67
MC12 x 40.0	MC310 x 60
MC12 x 35.0	MC310 x 52
MC12 x 31.0	MC310 x 46


W44

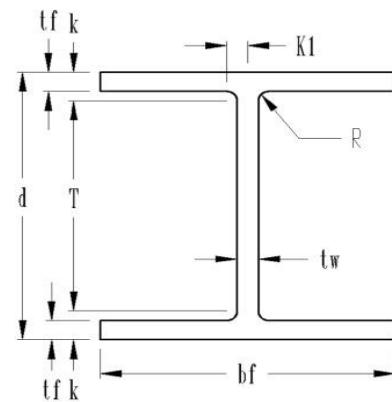

Prime Section Group	Section Size	Area	Depth	Flange		Distance			Fillet Radius	Elastic Properties						Plastic Modulus		
				Width	Thickness	T	k	k ₁		I _x	S _x	r _x	I _y	S _y	r _y	Z _x		
				A	d	t _w	b _f	t _f	Inch	Inch ⁴	Inch ³	Inch	Inch ⁴	Inch ³	Inch	Z _y	Inch ³	
44 x 16	W44 x 408	120.5	44.8	1.220	16.142	2.165	37.985	3.408	1.790	1.18	38500	1720	17.9	1520	188	3.55	1990	297
	W44 x 368	108.9	44.41	1.102	16.024	1.969	37.987	3.212	1.731	1.18	34500	1550	17.8	1350	168	3.52	1790	265
	W44 x 337	98.7	44.02	1.025	15.945	1.770	37.993	3.014	1.694	1.18	31100	1410	17.8	1200	150	3.49	1620	236
	W44 x 290	85.8	43.62	0.865	15.825	1.575	37.983	2.819	1.614	1.18	27000	1240	17.8	1040	132	3.49	1410	205
	W44 x 262	77.2	43.31	0.785	15.750	1.415	37.993	2.659	1.574	1.18	24100	1110	17.7	923	117	3.47	1270	182
	W44 x 230	67.9	42.91	0.710	15.750	1.220	37.983	2.464	1.536	1.18	20800	971	17.5	796	101	3.43	1100	157


W1100

METRIC

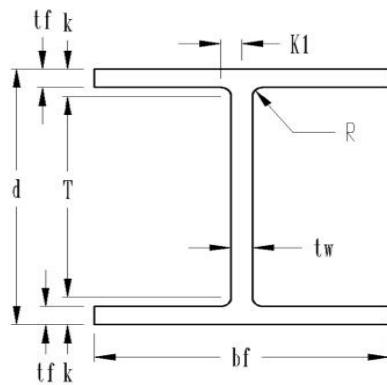


Prime Section Group	Section Size mm x kg/m	Area mm ²	Depth mm	Web Thickness Width mm	Flange		Distance			Fillet Radius mm	Elastic Properties						Plastic Modulus		
					t _w mm	b _f mm	t _f mm	T mm	k mm	k ₁ mm		X - X		Y - Y					
												I _x 10 ⁶ mm ⁴	S _x 10 ³ mm ³	r _x mm	I _y 10 ⁶ mm ⁴	S _y 10 ³ mm ³	r _y mm	Z _x 10 ³ mm ³	Z _y 10 ³ mm ³
												16 025	28 186	454	633	3 086	90.2	32 610	4 867
1100 x 400	W1100 x 607	77 740	1 138	31.0	410	55.0	965	87	46	30	14 360	25 400	452	562	2 761	89.4	29 333	4 343	
	W1100 x 548	70 250	1 128	28.0	407	50.0	965	82	44	30	12 945	23 106	452	499	2 458	88.6	26 547	3 867	
	W1100 x 499	63 500	1 118	26.0	405	45.0	965	77	43	30	11 238	20 320	452	433	2 163	88.6	23 106	3 359	
	W1100 x 433	55 100	1 108	22.0	402	40.0	965	72	41	30	10 031	18 190	450	384	1 917	88.1	20 811	2 982	
	W1100 x 390	49 700	1 100	20.0	400	36.0	965	68	40	30	8 658	15 912	445	331	1 655	87.1	18 026	2 573	
	W1100 x 343	43 600	1 090	18.0	400	31.0	965	63	39	30									

W40

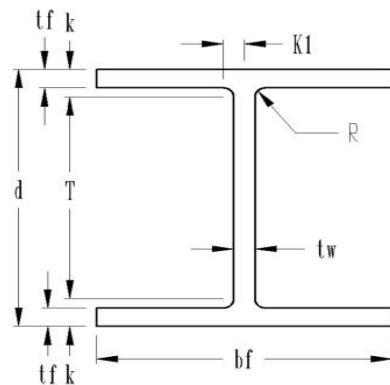


Prime Section Group	Section Size	Area	Depth	Flange		Distance			Fillet Radius R	Elastic Properties						Plastic Modulus		
				Web Thickness tw	Width bf	Thickness tf	T	k	kl		X - X			Y - Y				
											I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch	Z _x Inch ³	Z _y Inch ³
40 x 16	W40 x 655	192.6	43.62	1.970	16.870	3.540	34.053	4.784	2.166	1.18	56100	2570	17.1	2860	339	3.85	3050	539
	W40 x 593	174.4	42.99	1.790	16.690	3.230	34.043	4.474	2.076	1.18	50000	2330	16.9	2520	302	3.80	2740	479
	W40 x 503	147.8	42.05	1.535	16.415	2.755	34.053	3.999	1.949	1.18	41200	1960	16.7	2040	249	3.72	2290	393
	W40 x 431	126.7	41.26	1.340	16.220	2.360	34.053	3.604	1.851	1.18	34800	1690	16.6	1690	208	3.65	1960	328
	W40 x 397	117.0	40.95	1.220	16.120	2.200	34.063	3.444	1.791	1.18	32000	1560	16.6	1540	191	3.64	1800	300
	W40 x 372	109.4	40.63	1.160	16.065	2.045	34.053	3.289	1.761	1.18	29600	1460	16.5	1420	177	3.60	1680	277
	W40 x 362	107.0	40.55	1.120	16.020	2.010	34.043	3.254	1.741	1.18	28900	1420	16.5	1380	173	3.60	1640	270
	W40 x 324	95.3	40.16	1.000	15.910	1.810	34.053	3.054	1.681	1.18	25600	1280	16.4	1220	153	3.58	1460	239
	W40 x 297	87.4	39.84	0.930	15.825	1.650	34.053	2.894	1.646	1.18	23200	1170	16.3	1090	138	3.54	1330	215
	W40 x 277	81.3	39.69	0.830	15.830	1.575	34.053	2.819	1.596	1.18	21900	1100	16.4	1040	132	3.58	1250	204
	W40 x 249	73.3	39.38	0.750	15.750	1.420	34.053	2.664	1.556	1.18	19600	993	16.3	926	118	3.55	1120	182
	W40 x 215	63.3	38.98	0.650	15.750	1.220	34.053	2.464	1.506	1.18	16700	859	16.2	796	101	3.54	964	156
	W40 x 199	58.4	38.67	0.650	15.750	1.065	34.053	2.309	1.506	1.18	14900	770	16.0	695	88.2	3.45	869	137
40 x 11-3/4	W40 x 392	115.3	41.57	1.415	12.360	2.520	34.045	3.763	1.888	1.18	29500	1420	16.0	802	130.0	2.64	1690	211
	W40 x 327	95.9	40.79	1.180	12.130	2.130	34.043	3.374	1.771	1.18	24500	1200	16.0	640	105	2.58	1410	170
	W40 x 294	86.2	40.39	1.060	12.010	1.930	34.043	3.174	1.711	1.18	21900	1080	15.9	562	93.5	2.55	1270	150
	W40 x 278	81.9	40.16	1.025	11.970	1.810	34.055	3.053	1.693	1.18	20500	1020	15.8	521	87.1	2.52	1190	140
	W40 x 264	77.6	40.00	0.960	11.930	1.730	34.053	2.974	1.661	1.18	19400	971	15.8	493	82.6	2.52	1130	132
	W40 x 235	68.9	39.69	0.830	11.890	1.575	34.053	2.819	1.596	1.18	17400	875	15.9	444	74.6	2.54	1010	118
	W40 x 211	62.0	39.37	0.750	11.810	1.415	34.053	2.659	1.556	1.18	15500	786	15.8	390	66.1	2.51	906	105
	W40 x 183	53.7	38.98	0.650	11.810	1.200	34.093	2.444	1.506	1.18	13200	675	15.7	331	56.0	2.49	774	88.3
	W40 x 167	49.1	38.59	0.650	11.810	1.025	34.053	2.269	1.506	1.18	11600	600	15.3	283	47.9	2.40	693	76.0
	W40 x 149	43.8	38.20	0.630	11.810	0.830	34.053	2.074	1.496	1.18	9800	513	15.0	229	38.8	2.29	598	62.2

W1000
METRIC

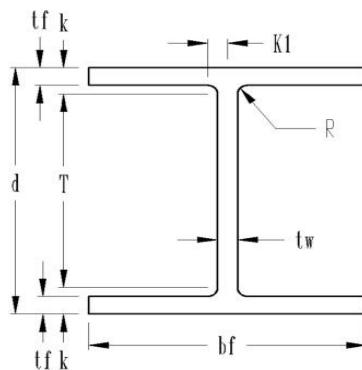

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick-ness t_w mm	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus	
					Width b_f mm	Thick-ness t_f mm					I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm	Z_x 10^3 mm^3	Z_y 10^3 mm^3
					A mm^2	d mm	b_f mm	t_f mm	T mm		I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm	Z_x 10^3 mm^3	Z_y 10^3 mm^3
					mm x kg/m	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm
1000 x 400	W1000 x 642	81 800	1 048	34.0	412	60.0	865	92	47	30	14 485	27 694	422	703	3 408	92.7	32 119	5 375
	W1000 x 591	75 300	1 040	31.0	409	55.9	865	87	46	30	13 319	25 564	422	641	3 130	92.5	29 497	4 916
	W1000 x 554	70 600	1 032	29.5	408	52.0	865	84	45	30	12 320	23 925	419	591	2 900	91.4	27 530	4 539
	W1000 x 539	68 700	1 030	28.4	407	51.1	865	83	44	30	12 029	23 270	419	574	2 835	91.4	26 875	4 424
	W1000 x 483	61 500	1 020	25.4	404	46.0	865	78	43	30	10 656	20 975	417	508	2 507	90.9	23 925	3 916
	W1000 x 443	56 400	1 012	23.6	402	41.9	865	73	42	30	9 657	19 173	414	454	2 261	89.9	21 795	3 523
	W1000 x 412	52 500	1 008	21.1	402	40.0	865	72	41	30	9 115	18 026	417	433	2 163	90.9	20 484	3 343
	W1000 x 371	47 300	1 000	19.0	400	36.1	865	68	40	30	8 158	16 272	414	385	1 934	90.2	18 353	2 982
	W1000 x 321	40 800	990	16.5	400	31.0	865	63	38	30	6 951	14 076	411	331	1 655	89.9	15 797	2 556
	W1000 x 296	37 700	982	16.5	400	27.1	865	59	38	30	6 202	12 618	406	289	1 445	87.6	14 240	2 245
1000 x 300	W1000 x 584	74 400	1 056	36.0	318	64.0	865	96	48	30	12 279	23 270	406	334	2 130	67.1	27 694	3 458
	W1000 x 486	61 900	1 036	30.0	308	54.1	865	86	45	30	10 198	19 664	406	266	1 721	65.5	23 106	2 786
	W1000 x 438	55 600	1 026	26.9	305	49.0	865	81	43	30	9 115	17 698	404	234	1 532	64.8	20 811	2 458
	W1000 x 415	52 800	1 020	26.0	304	46.0	865	78	43	30	8 533	16 715	401	217	1 427	64.0	19 501	2 294
	W1000 x 393	50 100	1 016	24.4	303	43.9	865	75	42	30	8 075	15 912	401	205	1 354	64.0	18 517	2 163
	W1000 x 350	44 600	1 008	21.1	302	40.0	865	72	41	30	7 242	14 339	404	185	1 222	64.5	16 551	1 934
	W1000 x 314	40 000	1 000	19.1	300	35.9	865	67	40	30	6 452	12 880	401	162	1 083	63.8	14 847	1 721
	W1000 x 272	34 600	990	16.5	300	31.0	865	63	38	30	5 494	11 061	399	138	918	63.2	12 684	1 447
	W1000 x 249	31 700	980	16.5	300	26.0	865	58	38	30	4 828	9 832	389	118	785	61.0	11 356	1 245
	W1000 x 222	28 200	970	16.0	300	21.1	865	53	38	30	4 079	8 407	381	95.3	636	58.2	9 799	1 019


W36

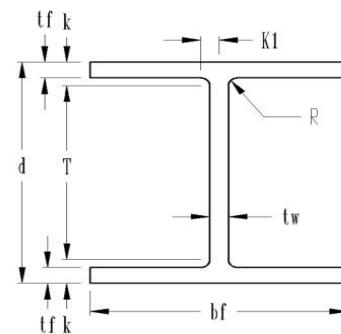

Prime Section Group	Section Size	Area	Depth	Web Thick-ness	Flange		Distance			Fillet Radius	Elastic Properties						Plastic Modulus	
					Width	Thick-ness					I _x	S _x	r _x	I _y	S _y	r _y		
					t _w	b _f	Inch	Inch	Inch		Inch ⁴	Inch ³	Inch	Inch ⁴	Inch ³	Inch	Z _x	Z _y
36 x 16-1/2	W36 x 652	191.7	41.05	1.970	17.575	3.540	31.483	4.784	2.166	1.18	50300	2450	16.2	3220	366	4.10	2900	580
	W36 x 529	155.6	39.79	1.610	17.220	2.910	31.485	4.153	1.985	1.18	39600	1990	16.0	2490	289	4.00	2330	454
	W36 x 487	143.2	39.33	1.500	17.105	2.680	31.485	3.923	1.930	1.18	36000	1830	15.8	2250	263	3.96	2130	412
	W36 x 441	129.7	38.85	1.360	16.965	2.440	31.483	3.684	1.861	1.18	32100	1650	15.7	1910	235	3.92	1910	368
	W36 x 395	116.2	38.37	1.220	16.830	2.200	31.483	3.444	1.791	1.18	28500	1490	15.7	1750	208	3.88	1710	325
	W36 x 361	106.1	37.99	1.120	16.730	2.010	31.483	3.254	1.741	1.18	25700	1350	15.6	1570	188	3.85	1550	293
	W36 x 330	97.0	37.67	1.020	16.630	1.850	31.483	3.094	1.691	1.18	23300	1240	15.5	1420	171	3.83	1410	265
	W36 x 302	88.8	37.33	0.945	16.655	1.680	31.483	2.924	1.654	1.18	21100	1130	15.4	1300	156	3.82	1280	241
	W36 x 282	82.9	37.11	0.885	16.595	1.570	31.483	2.814	1.624	1.18	19600	1050	15.4	1200	144	3.80	1190	223
	W36 x 262	77.0	36.85	0.840	16.550	1.440	31.483	2.684	1.601	1.18	17900	972	15.3	1090	132	3.76	1100	204
	W36 x 247	72.5	36.67	0.800	16.510	1.350	31.483	2.594	1.581	1.18	16700	913	15.2	1010	123	3.74	1030	190
	W36 x 231	68.0	36.49	0.760	16.470	1.260	31.483	2.504	1.561	1.18	15600	854	15.1	940	114	3.71	963	176
36 x 12	W36 x 256	75.4	37.43	0.960	12.215	1.730	31.483	2.974	1.661	1.18	16800	895	14.9	528	86.5	2.65	1040	137
	W36 x 232	68.1	37.12	0.870	12.120	1.570	31.493	2.814	1.616	1.18	15000	809	14.8	468	77.2	2.62	936	122
	W36 x 210	61.8	36.69	0.830	12.180	1.360	31.483	2.604	1.596	1.18	13200	719	14.6	411	67.5	2.58	833	107
	W36 x 194	57.0	36.49	0.765	12.115	1.260	31.483	2.504	1.564	1.18	12100	664	14.6	375	61.9	2.56	767	97.7
	W36 x 182	53.6	36.33	0.725	12.075	1.180	31.483	2.424	1.544	1.18	11300	623	14.5	347	57.6	2.55	718	90.7
	W36 x 170	50.0	36.17	0.680	12.030	1.100	31.483	2.344	1.521	1.18	10500	581	14.5	320	53.2	2.53	668	83.8
	W36 x 160	47.0	36.01	0.650	12.000	1.020	31.483	2.264	1.506	1.18	9760	542	14.4	295	49.1	2.50	624	77.3
	W36 x 150	44.2	35.85	0.625	11.975	0.940	31.483	2.184	1.494	1.18	9040	504	14.3	270	45.1	2.47	581	70.9
	W36 x 135	39.7	35.55	0.600	11.950	0.790	31.483	2.034	1.481	1.18	7800	439	14.0	225	37.7	2.38	509	59.7


W920

METRIC

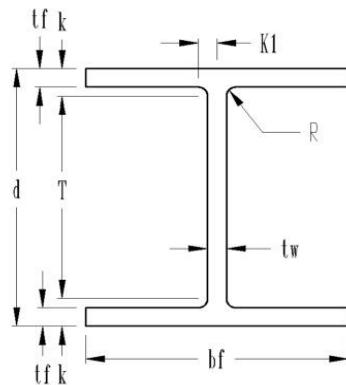

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick-ness mm	Flange		Distance			Fillet Radius mm	Elastic Properties						Plastic Modulus	
					Width mm	Thick-ness mm					I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm	Z_x 10^3 mm^3	Z_y 10^3 mm^3
					A mm ²	t_w mm	b_f mm	t_f mm										
920 x 420	W920 x 970	123 700	1 043	50.0	446	89.9	800	122	55	30	20 936	40 148	411	1340	6 005	104.1	47 522	9 504
	W920 x 787	100 400	1 011	40.9	437	73.9	800	105	50	30	16 483	32 610	406	1036	4 736	101.6	38 182	7 440
	W920 x 725	92 400	999	38.1	434	68.1	800	100	49	30	14 984	29 988	401	937	4 310	100.6	34 904	6 751
	W920 x 656	83 700	987	34.5	431	62.0	800	94	47	30	13 361	27 039	399	795	3 851	99.6	31 299	6 030
	W920 x 588	75 000	975	31.0	427	55.9	800	87	46	30	11 863	24 417	399	728	3 408	98.6	28 022	5 326
	W920 x 537	68 500	965	28.4	425	51.1	800	83	44	30	10 697	22 122	396	653	3 081	97.8	25 400	4 801
	W920 x 491	62 600	957	25.9	422	47.0	800	79	43	30	9 698	20 320	394	591	2 802	97.3	23 106	4 343
	W920 x 449	57 600	948	24.0	423	42.7	800	74	42	30	8 782	18 517	391	541	2 556	97.0	20 975	3 949
	W920 x 420	53 500	943	22.5	422	39.9	800	71	41	30	8 158	17 206	391	499	2 360	96.5	19 501	3 654
	W920 x 390	49 700	936	21.3	420	36.6	800	68	41	30	7 451	15 928	389	454	2 163	95.5	18 026	3 343
	W920 x 368	46 800	931	20.3	419	34.3	799	66	40	30	6 951	14 961	386	420	2 016	95.0	16 879	3 114
920 x 300	W920 x 344	43 900	927	19.3	418	32.0	800	64	40	30	6 493	13 994	384	391	1 868	94.2	15 781	2 884
	W920 x 381	48 600	951	24.4	310	43.9	800	75	42	30	6 993	14 666	378	220	1 417	67.3	17 042	2 245
	W920 x 345	44 000	943	22.1	308	39.9	800	71	41	30	6 243	13 257	376	195	1 265	66.5	15 338	1 999
	W920 x 313	39 900	932	21.1	309	34.5	800	66	41	30	5 494	11 782	371	171	1 106	65.5	13 650	1 753
	W920 x 289	36 800	927	19.4	308	32.0	800	64	40	30	5 036	10 881	371	156	1 014	65.0	12 569	1 601
	W920 x 271	34 600	923	18.4	307	30.0	800	62	39	30	4 703	10 209	368	144	944	64.8	11 766	1 486
	W920 x 253	32 300	919	17.3	306	27.9	800	59	39	30	4 370	9 521	368	133	872	64.3	10 947	1 373
	W920 x 238	30 300	915	16.5	305	25.9	800	57	38	30	4 062	8 882	366	123	805	63.5	10 225	1 267
	W920 x 223	28 500	911	15.9	304	23.9	800	55	38	30	3 763	8 259	363	112	739	62.7	9 521	1 162
	W920 x 201	25 600	903	15.2	304.0	20.1	800	52	38	30	3 247	7 194	356	93.7	618	60.5	8 341	978


W33

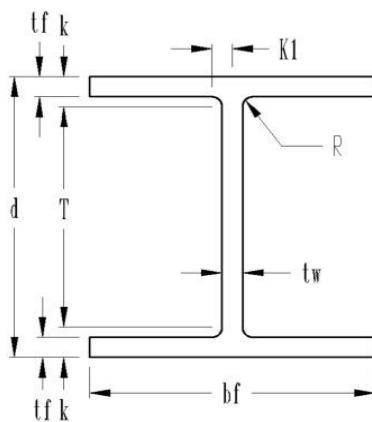

Prime Section Group	Section Size	Area Inch x lbs/ft	Depth Inch	Web Thick- ness Inch	Flange		Distance			Fillet Radius Inch	Elastic Properties					Plastic Modulus		
					Width Inch	Thickness Inch					I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch		
					b _f Inch	t _f Inch	T In	k In	k ₁ In		Inch ⁴	Inch ³	Inch	Inch ⁴	Inch ³	Inch	Z _x Inch ³	Z _y Inch ³
33 x 15-3/4	W33 x 387	114.0	35.95	1.260	16.200	2.280	28.903	3.524	1.811	1.18	24300	1350	14.6	1620	200	3.77	1560	312
	W33 x 354	104.1	35.55	1.160	16.100	2.090	28.883	3.334	1.761	1.18	22000	1240	14.5	1460	181	3.74	1420	282
	W33 x 318	93.5	35.16	1.040	15.985	1.890	28.893	3.134	1.701	1.18	19500	1110	14.5	1290	161	3.71	1270	250
	W33 x 291	85.6	34.84	0.960	15.905	1.730	28.893	2.974	1.661	1.18	17700	1020	14.4	1160	146	3.68	1160	226
	W33 x 263	77.4	34.53	0.870	15.805	1.570	28.903	2.814	1.616	1.18	15900	919	14.3	1040	131	3.66	1040	202
	W33 x 241	70.9	34.18	0.830	15.860	1.400	28.893	2.644	1.596	1.18	14200	831	14.1	933	118	3.62	940	182
	W33 x 221	65.0	33.93	0.775	15.805	1.275	28.893	2.519	1.569	1.18	12900	759	14.1	840	106	3.59	857	164
	W33 x 201	59.1	33.68	0.715	15.745	1.150	28.893	2.394	1.539	1.18	11600	686	14.0	749	95.2	3.56	773	147
33 x 11-1/2	W33 x 169	49.5	33.82	0.670	11.500	1.220	28.893	2.464	1.516	1.18	9290	549	13.7	310	53.9	2.50	629	84.4
	W33 x 152	44.7	33.49	0.635	11.565	1.055	28.893	2.299	1.499	1.18	8160	487	13.5	273	47.2	2.47	559	73.9
	W33 x 141	41.6	33.30	0.605	11.535	0.960	28.893	2.204	1.484	1.18	7450	448	13.4	246	42.7	2.43	514	66.9
	W33 x 130	38.3	33.09	0.580	11.510	0.855	28.893	2.099	1.471	1.18	6710	406	13.2	218	37.9	2.39	467	59.5
	W33 x 118	34.7	32.86	0.550	11.480	0.740	28.893	1.984	1.456	1.18	5900	359	13.0	187	32.6	2.32	415	51.3


W840

METRIC

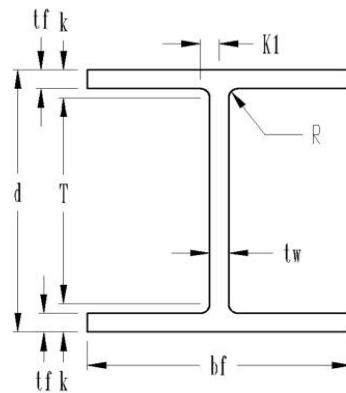

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thickness t_w mm	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus				
					Width b_f mm	Thickness t_f mm	T mm	k mm	k_1 mm		X - X			Y - Y							
											I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm					
840 x 400	W840 x 576	73 500	913	32.0	411	57.9	734	89	46	30	10 114	22 122	371	674	3 277	95.8	25 564	5 113			
	W840 x 527	67 200	903	29.5	409	53.1	734	85	45	30	9 157	20 320	368	608	2 966	95.0	23 270	4 621			
	W840 x 473	60 300	893	26.4	406	48.0	734	80	43	30	8 117	18 190	368	537	2 638	94.2	20 811	4 097			
	W840 x 433	55 200	885	24.4	404	43.9	734	75	42	30	7 367	16 715	366	483	2 393	93.5	19 009	3 703			
	W840 x 392	49 900	877	22.1	401	39.9	734	71	41	30	6 618	15 060	363	433	2 147	93.0	17 042	3 310			
	W840 x 359	45 700	868	21.1	403	35.6	734	67	41	30	5 910	13 618	358	388	1 934	91.9	15 404	2 982			
	W840 x 329	41 900	862	19.7	401	32.4	734	64	40	30	5 369	12 438	358	350	1 737	91.2	14 044	2 687			
	W840 x 299	38 100	855	18.2	400	29.2	734	61	39	30	4 828	11 241	356	312	1 560	90.4	12 667	2 409			
840 x 290	W840 x 251	31 900	859	17.0	292	31.0	734	63	39	30	3 867	8 996	348	129	883	63.5	10 307	1 383			
	W840 x 226	28 800	851	16.1	294	26.8	734	58	38	30	3 396	7 980	343	114	773	62.7	9 160	1 211			
	W840 x 210	26 800	846	15.4	293	24.4	734	56	38	30	3 101	7 341	340	102	700	61.7	8 423	1 096			
	W840 x 193	24 700	840	14.7	292	21.7	734	53	37	30	2 793	6 653	335	90.7	621	60.7	7 653	975			
	W840 x 176	22 400	835	14.0	292	18.8	734	50	37	30	2 456	5 883	330	77.8	534	58.9	6 801	841			


W30

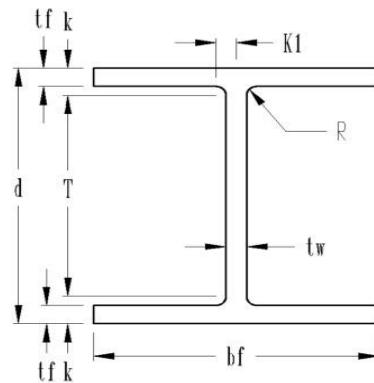

Prime Section Group	Section Size	Area	Depth	Web Thick- ness	Flange		Distance			Fillet Radius	Elastic Properties						Plastic Modulus		
					Width Inch	Thickness Inch	T In	k In	k ₁ In		I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch			
30 x 15	W30 x 433	127.1	33.66	1.500	15.725	2.680	25.813	3.924	1.931	1.18	23100	1370	13.5	1740	221	3.70	1610	347	
	W30 x 391	115.0	33.19	1.360	15.590	2.440	25.823	3.684	1.861	1.18	20700	1250	13.4	1550	198	3.67	1450	310	
	W30 x 357	104.8	32.80	1.240	15.470	2.240	25.833	3.484	1.801	1.18	18700	1140	13.3	1390	179	3.64	1320	279	
	W30 x 326	95.7	32.40	1.140	15.370	2.050	25.813	3.294	1.751	1.18	16800	1040	13.2	1240	162	3.60	1190	252	
	W30 x 292	85.7	32.01	1.020	15.255	1.850	25.823	3.094	1.691	1.18	14900	930	13.2	1100	144	3.58	1060	223	
	W30 x 261	76.7	31.61	0.930	15.155	1.650	25.823	2.894	1.646	1.18	13100	829	13.1	959	127	3.53	943	196	
	W30 x 235	69.0	31.30	0.830	15.055	1.500	25.813	2.744	1.596	1.18	11700	748	13.0	855	114	3.51	847	175	
	W30 x 211	62.0	30.94	0.775	15.105	1.315	25.823	2.559	1.569	1.18	10300	665	12.9	757	100	3.49	751	155	
	W30 x 191	56.1	30.68	0.710	15.040	1.185	25.823	2.429	1.536	1.18	9200	600	12.8	673	89.5	3.46	675	138	
	W30 x 173	50.8	30.44	0.655	14.985	1.065	25.823	2.309	1.509	1.18	8230	541	12.7	598	79.8	3.42	607	123	
30 x 10-1/2	W30 x 148	43.5	30.67	0.650	10.480	1.180	25.823	2.424	1.506	1.18	6680	436	12.4	227	43.3	2.28	500	68.0	
	W30 x 132	38.9	30.31	0.615	10.545	1.000	25.823	2.244	1.489	1.18	5770	380	12.2	196	37.2	2.25	437	58.4	
	W30 x 124	36.5	30.17	0.585	10.515	0.930	25.823	2.174	1.474	1.18	5360	355	12.1	181	34.4	2.23	408	54.0	
	W30 x 116	34.2	30.01	0.565	10.495	0.850	25.823	2.094	1.464	1.18	4930	329	12.0	164	31.3	2.19	378	49.2	
	W30 x 108	31.7	29.83	0.545	10.475	0.760	25.823	2.004	1.454	1.18	4470	299	11.9	146	27.9	2.15	346	43.9	
	W30 x 99	29.1	29.65	0.520	10.450	0.670	25.823	1.914	1.441	1.18	3990	269	11.7	128	24.5	2.10	312	38.6	
	W30 x 90	26.4	29.53	0.470	10.400	0.610	25.823	1.854	1.416	1.18	3610	245	11.7	115	22.1	2.09	283	34.7	


W760

METRIC

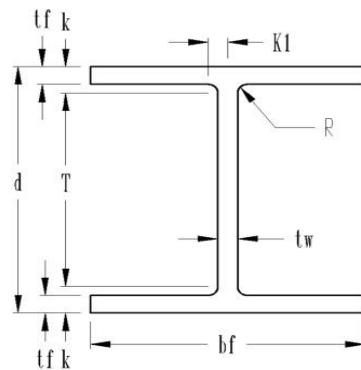

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick-ness	Flange			Distance			Fillet Radius R	Elastic Properties						Plastic Modulus			
					Width b_f mm	Thick-ness t_f mm	T mm	k mm	k_l mm	X - X			Y - Y								
										I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm	Z_x 10^3 mm^3	Z_y 10^3 mm^3				
760 x 380	W760 x 644	82 013	855	38.1	399	68.1	656	100	49	30	9 615	22 450	342	724	3 627	94.0	26 383	5 686			
	W760 x 582	74 200	843	34.5	396	62.0	656	94	47	30	8 616	20 484	340	645	3 245	93.2	23 761	5 080			
	W760 x 531	67 600	833	31.5	393	56.9	656	88	46	30	7 784	18 681	338	579	2 933	92.5	21 631	4 572			
	W760 x 484	61 700	823	29.0	390	52.1	656	84	45	30	6 993	17 042	335	516	2 655	91.4	19 501	4 130			
	W760 x 434	55 300	813	25.9	387	47.0	656	79	43	30	6 202	15 240	335	458	2 360	90.9	17 370	3 654			
	W760 x 389	49 500	803	23.6	385	41.9	656	73	42	30	5 453	13 585	333	399	2 081	89.7	15 453	3 212			
	W760 x 350	44 500	795	21.1	382	38.1	656	70	41	30	4 870	12 257	330	356	1 868	89.2	13 880	2 868			
	W760 x 314	40 000	786	19.7	384	33.4	656	65	40	30	4 287	10 897	328	315	1 639	88.6	12 307	2 540			
	W760 x 284	36 200	779	18.0	382	30.1	656	62	39	30	3 829	9 832	325	280	1 467	87.9	11 061	2 261			
	W760 x 257	32 800	773	16.6	381	27.1	656	59	38	30	3 426	8 865	323	249	1 308	86.9	9 947	2 016			
760 x 270	W760 x 220	28 100	779	16.5	266	30.0	656	62	38	30	2 780	7 145	315	94.5	710	57.9	8 194	1 114			
	W760 x 196	25 100	770	15.6	268	25.4	656	57	38	30	2 402	6 227	310	81.6	610	57.2	7 161	957			
	W760 x 185	23 500	766	14.9	267	23.6	656	55	37	30	2 231	5 817	307	75.3	564	56.6	6 686	885			
	W760 x 173	22 100	762	14.4	267	21.6	656	53	37	30	2 052	5 391	305	68.3	513	55.6	6 194	806			
	W760 x 161	20 500	758	13.8	266	19.3	656	51	37	30	1 861	4 900	302	60.8	457	54.6	5 670	719			
	W760 x 147	18 800	753	13.2	265	17.0	656	49	37	30	1 661	4 408	297	53.3	401	53.3	5 113	633			
	W760 x 134	17 000	750	11.9	264	15.5	656	47	36	30	1 503	4 015	297	47.9	362	53.1	4 638	569			


W27

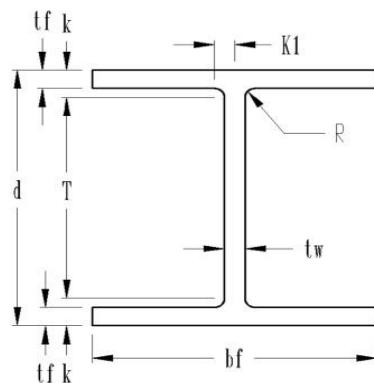

Prime Section Group	Section Size	Area Inch x lbs/ft	Depth Inch	Web Thickness t_w Inch	Flange		Distance			Fillet Radius R Inch	Elastic Properties					Plastic Modulus		
					Width b_f Inch	Thickness t_f Inch	T In	k In	k_1 In		X - X			Y - Y				
											I_x Inch^4	S_x Inch^3	r_x Inch	I_y Inch^4	S_y Inch^3	r_y Inch		
27 x 14	W27 x 539	158.4	32.52	1.970	15.255	3.540	22.953	4.784	2.166	1.18	25500	1570	12.7	2110	277	3.65	1880	437
	W27 x 368	108.1	30.39	1.380	14.665	2.480	22.943	3.724	1.871	1.18	16200	1060	12.2	1310	179	3.48	1240	279
	W27 x 336	98.7	30.00	1.260	14.550	2.280	22.953	3.524	1.811	1.18	14600	972	12.1	1180	162	3.45	1130	252
	W27 x 307	90.2	29.61	1.160	14.445	2.090	22.943	3.334	1.761	1.18	13100	887	12.0	1050	146	3.41	1030	227
	W27 x 281	82.6	29.29	1.060	14.350	1.930	22.943	3.174	1.711	1.18	11900	814	12.0	953	133	3.39	936	206
	W27 x 258	75.7	28.98	0.980	14.270	1.770	22.953	3.014	1.671	1.18	10800	745	11.9	859	120	3.36	852	187
	W27 x 235	69.1	28.66	0.910	14.190	1.610	22.953	2.854	1.636	1.18	9700	677	11.8	769	108	3.33	772	168
	W27 x 217	63.8	28.43	0.830	14.115	1.500	22.943	2.744	1.596	1.18	8910	627	11.8	704	100.0	3.32	711	154
	W27 x 194	57.0	28.11	0.750	14.035	1.340	22.943	2.584	1.556	1.18	7860	559	11.7	619	88.1	3.29	631	136
	W27 x 178	52.3	27.81	0.725	14.085	1.190	22.943	2.434	1.544	1.18	7020	505	11.6	555	78.8	3.25	570	122
	W27 x 161	47.4	27.59	0.660	14.020	1.080	22.943	2.324	1.511	1.18	6310	458	11.5	497	70.9	3.23	515	109
	W27 x 146	42.9	27.38	0.605	13.965	0.975	22.943	2.219	1.484	1.18	5660	414	11.5	443	63.5	3.20	464	97.7
27 x 10	W27 x 129	37.8	27.63	0.610	10.010	1.100	22.943	2.344	1.486	1.18	4760	345	11.2	184	36.8	2.21	395	57.6
	W27 x 114	33.5	27.29	0.570	10.070	0.930	22.943	2.174	1.466	1.18	4080	299	11.0	159	31.5	2.18	343	49.3
	W27 x 102	30.0	27.09	0.515	10.015	0.830	22.943	2.074	1.439	1.18	3620	267	11.0	139	27.8	2.15	305	43.4
	W27 x 94	27.7	26.92	0.490	9.990	0.745	22.943	1.989	1.426	1.18	3270	243	10.9	124	24.8	2.12	278	38.8
	W27 x 84	24.8	26.71	0.460	9.960	0.640	22.943	1.884	1.411	1.18	2850	213	10.7	106	21.2	2.07	244	33.2


W690

METRIC

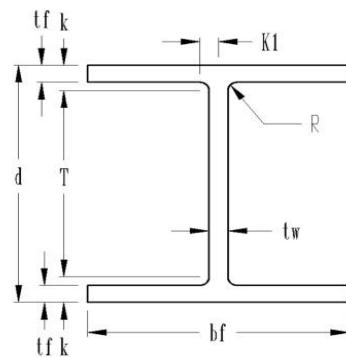

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick- ness t_w	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus				
					Width b_f mm	Thick- ness t_f mm	T mm	k mm	k_1 mm		X - X			Y - Y							
											I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm					
											Z_x 10^3 mm^3	Z_y 10^3 mm^3									
690 x 360	W690 x 802	102 200	826	50.1	387	89.9	583	122	55	30	10 614	25 728	322	878	4 533	92.7	30 808	7 161			
	W690 x 548	69 800	772	35.1	372	63.0	583	95	48	30	6 743	17 370	310	545	2 933	88.4	20 320	4 572			
	W690 x 500	63 700	762	32.0	369	57.9	583	89	46	30	6 077	15 928	307	491	2 655	87.6	18 517	4 130			
	W690 x 457	58 200	752	29.5	367	53.1	583	85	45	30	5 453	14 535	305	437	2 393	86.6	16 879	3 720			
	W690 x 419	53 300	744	26.9	364	49.0	583	81	43	30	4 953	13 339	305	397	2 179	86.1	15 338	3 376			
	W690 x 384	48 900	736	24.9	362	45.0	583	77	42	30	4 495	12 208	302	358	1 966	85.3	13 962	3 064			
	W690 x 350	44 600	728	23.1	360	40.9	583	72	42	30	4 037	11 094	300	320	1 770	84.6	12 651	2 753			
	W690 x 323	41 100	722	21.1	359	38.1	583	70	41	30	3 709	10 275	300	293	1 639	84.3	11 651	2 524			
	W690 x 289	36 800	714	19.0	356	34.0	583	66	40	30	3 272	9 160	297	258	1 444	83.6	10 340	2 229			
	W690 x 265	33 700	706	18.4	358	30.2	583	62	39	30	2 922	8 275	295	231	1 291	82.6	9 341	1 999			
	W690 x 240	30 600	701	16.8	356	27.4	583	59	38	30	2 626	7 505	292	207	1 162	82.0	8 439	1 786			
	W690 x 217	27 700	695	15.4	355	24.8	582	56	38	30	2 356	6 784	292	184	1 041	81.3	7 604	1 601			
690 x 250	690 x 192	24 400	702	15.5	254	27.9	583	59	38	30	1 981	5 654	284	76.6	603	56.1	6 473	944			
	690 x 170	21 600	693	14.5	256	23.6	583	55	37	30	1 698	4 900	279	66.2	516	55.4	5 621	808			
	690 x 152	19 400	688	13.1	254	21.1	583	53	37	30	1 507	4 375	279	57.9	456	54.6	4 998	711			
	690 x 140	17 900	684	12.4	254	18.9	583	50	36	30	1 361	3 982	277	51.6	406	53.8	4 556	636			
	690 x 125	16 000	678	11.7	253	16.3	582	48	36	30	1 186	3 490	272	44.1	347	52.6	3 998	544			


W24

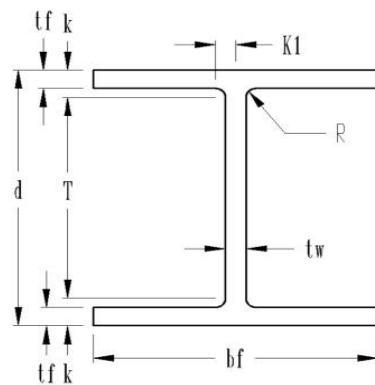

Prime Section Group	Section Size	Area Inch x lbs/ft	Depth Inch	Web Thick- ness Inch	Flange		Distance			Fillet Radius Inch	Elastic Properties					Plastic Modulus		
					Width Inch	Thickness Inch					I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch	Z _x Inch ³	Z _y Inch ³
					A Inch	d Inch	t _w Inch	b _f Inch	t _f Inch		I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch	Z _x Inch ³	Z _y Inch ³
					T In	k In	k ₁ In	R Inch	I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch	Z _x Inch ³	Z _y Inch ³		
24 x 12-3/4	W24 x 370	108.0	27.99	1.520	13.660	2.720	20.063	3.964	1.941	1.18	13400	957	11.1	1160	170	3.27	1130	267
	W24 x 335	98.4	27.52	1.380	13.520	2.480	20.073	3.724	1.871	1.18	11900	864	11.0	1030	152	3.23	1020	238
	W24 x 306	89.8	27.13	1.260	13.405	2.280	20.083	3.524	1.811	1.18	10700	789	10.9	919	137	3.20	922	214
	W24 x 279	82.0	26.73	1.160	13.305	2.090	20.063	3.334	1.761	1.18	9600	718	10.8	823	124	3.17	835	193
	W24 x 250	73.5	26.34	1.040	13.185	1.890	20.073	3.134	1.701	1.18	8490	644	10.7	724	110	3.14	744	171
	W24 x 229	67.2	26.02	0.960	13.110	1.730	20.073	2.974	1.661	1.18	7650	588	10.7	651	99.4	3.11	675	154
	W24 x 207	60.7	25.71	0.870	13.010	1.570	20.083	2.814	1.616	1.18	6820	531	10.6	578	88.8	3.08	606	137
	W24 x 192	56.3	25.47	0.810	12.950	1.460	20.063	2.704	1.586	1.18	6260	491	10.5	530	81.8	3.07	559	126
	W24 x 176	51.7	25.24	0.750	12.890	1.340	20.073	2.584	1.556	1.18	5680	450	10.5	479	74.3	3.04	511	115
	W24 x 162	47.7	25.00	0.705	12.955	1.220	20.073	2.464	1.534	1.18	5170	414	10.4	443	68.4	3.05	468	105
	W24 x 146	43.0	24.74	0.650	12.900	1.090	20.073	2.334	1.506	1.18	4580	371	10.3	391	60.5	3.01	418	93.2
	W24 x 131	38.5	24.48	0.605	12.855	0.960	20.073	2.204	1.484	1.18	4020	329	10.2	340	53.0	2.97	370	81.5
	W24 x 117	34.4	24.26	0.550	12.800	0.850	20.073	2.094	1.456	1.18	3540	291	10.1	297	46.5	2.94	327	71.4
	W24 x 104	30.6	24.06	0.500	12.750	0.750	20.073	1.994	1.431	1.18	3100	258	10.1	259	40.7	2.91	289	62.4
24 x 9	W24 x 103	30.3	24.53	0.550	9.000	0.980	20.083	2.224	1.456	1.18	3000	245	10.00	119	26.5	1.99	280	41.5
	W24 x 94	27.7	24.31	0.515	9.065	0.875	20.073	2.119	1.439	1.18	2700	222	9.87	109	24.0	1.98	254	37.5
	W24 x 84	24.7	24.10	0.470	9.020	0.770	20.073	2.014	1.416	1.18	2370	196	9.79	94.4	20.9	1.95	224	32.6
	W24 x 76	22.4	23.92	0.440	8.990	0.680	20.073	1.924	1.401	1.18	2100	176	9.69	82.5	18.4	1.92	200	28.6
	W24 x 68	20.1	23.73	0.415	8.965	0.585	20.073	1.829	1.389	1.18	1830	154	9.55	70.4	15.7	1.87	177	24.5
CSA	W24 x 61	18.0	23.56	0.380	8.930	0.500	20.073	1.744	1.371	1.18	1602	136	9.45	59.6	13.4	1.82	156	20.9
	W24 x 56	16.6	23.48	0.355	8.900	0.460	20.073	1.704	1.359	1.18	1473	126	9.41	54.3	12.2	1.81	144	19.1
24 x 7	W24 x 62	18.2	23.74	0.430	7.040	0.590	20.939	1.401	0.963	0.75	1550	131	9.23	34.5	9.8	1.38	153	15.7
	W24 x 55	16.2	23.57	0.395	7.005	0.505	20.939	1.316	0.946	0.75	1350	114	9.11	29.1	8.30	1.34	134	13.3

W610


METRIC

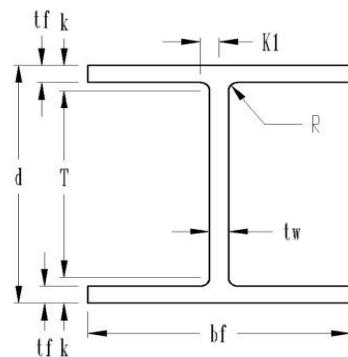

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick- ness t_w mm	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus	
					Width b_f mm	Thick- ness t_f mm	T mm	k mm	k_1 mm		I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm		
											Z_x 10^3 mm^3	Z_y 10^3 mm^3						
610 x 320	W610 x 551	70 200	711	38.6	347	69.1	510	101	49	30	5 577	15 682	282	483	2 786	83.1	18 517	4 375
	W610 x 498	63 500	699	35.1	343	63.0	510	94	48	30	4 953	14 158	279	429	2 491	82.0	16 715	3 900
	W610 x 455	57 900	689	32.0	340	57.9	510	89	46	30	4 454	12 929	277	383	2 245	81.3	15 109	3 507
	W610 x 415	52 900	679	29.5	338	53.1	510	85	45	30	3 996	11 766	274	343	2 032	80.5	13 683	3 163
	W610 x 372	47 400	669	26.4	335	48.0	510	80	43	30	3 534	10 553	272	301	1 803	79.8	12 192	2 802
	W610 x 341	43 400	661	24.4	333	43.9	510	75	42	30	3 184	9 636	272	271	1 629	79.0	11 061	2 524
	W610 x 307	39 100	653	22.1	330	39.9	510	71	41	30	2 839	8 701	269	241	1 455	78.2	9 931	2 245
	W610 x 285	36 100	647	20.6	329	37.1	510	69	40	30	2 606	8 046	267	221	1 340	78.0	9 160	2 065
	W610 x 262	33 300	641	19.0	327	34.0	510	66	40	30	2 364	7 374	267	199	1 218	77.2	8 374	1 885
	W610 x 241	30 800	635	17.9	329	31.0	510	63	39	30	2 152	6 784	264	184	1 121	77.5	7 669	1 721
	W610 x 217	27 700	628	16.5	328	27.7	510	59	38	30	1 906	6 080	262	163	991	76.5	6 850	1 527
	W610 x 195	24 800	622	15.4	327	24.4	510	56	38	30	1 673	5 391	259	142	869	75.4	6 063	1 336
	W610 x 174	22 200	616	14.0	325	21.6	510	53	37	30	1 473	4 769	257	124	762	74.7	5 359	1 170
	W610 x 155	19 700	611	12.7	324	19.0	510	51	36	30	1 290	4 228	257	108	667	73.9	4 736	1 023
610 x 230	W610 x 153	19 600	623	14.0	229	24.9	510	56	37	30	1 249	4 015	254	49.5	434	50.5	4 588	680
	W610 x 140	17 900	617	13.1	230	22.2	510	54	37	30	1 124	3 638	251	45.4	393	50.3	4 162	615
	W610 x 125	15 900	612	11.9	229	19.6	510	51	36	30	986	3 212	249	39.3	342	49.5	3 671	534
	W610 x 113	14 500	608	11.2	228	17.3	510	49	36	30	874	2 884	246	34.3	302	48.8	3 277	469
	W610 x 101	13 000	603	10.5	228	14.9	510	46	35	30	762	2 524	243	29.3	257	47.5	2 900	401
CSA	W610 x 91	11 500	598	9.7	227	12.7	510	44	35	30	657	2 200	239	24.8	219	46.5	2 520	342
CSA	W610 x 84	10 600	596	9.0	226	11.7	510	43	35	30	603	2 020	239	22.6	200	46.2	2 320	311
610 x 180	W610 x 92	11 700	603	10.9	179	15.0	535	34	24	19	645	2 147	234	14.4	161	35.1	2 507	257
	W610 x 82	10 500	599	10.0	178	12.8	535	32	24	19	562	1 868	231	12.1	136	34.0	2 196	218


W250

METRIC

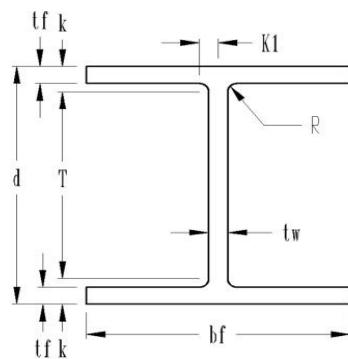

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick- ness t_w	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus				
					Width b_f mm	Thick- ness t_f mm	T mm	k mm	k_1 mm		X - X			Y - Y							
											I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm					
																	Z_x 10^3 mm^3	Z_y 10^3 mm^3			
250 x 250	W250 x 167	21 200	289	19.2	265	31.8	184	52	29	19	298	2 065	118	98.2	742	68.1	2 409	1 134			
	W250 x 149	19 000	282	17.3	263	28.4	184	49	28	19	259	1 835	117	86.2	655	67.3	2 130	1 000			
	W250 x 131	16 700	275	15.4	261	25.1	184	46	27	19	222	1 614	115	74.5	570	66.8	1 852	870			
	W250 x 115	14 600	269	13.5	259	22.1	184	43	26	19	189	1 408	114	64.1	493	66.0	1 599	752			
	W250 x 101	12 900	264	11.9	257	19.6	184	40	25	19	164	1 240	113	55.8	433	65.8	1 398	657			
	W250 x 89	11 400	260	10.7	256	17.3	184	38	24	19	142	1 093	112	48.3	377	65.3	1 222	574			
	W250 x 80	10 200	256	9.4	255	15.6	184	36	24	19	126	983	111	42.9	338	65.0	1 091	513			
	W250 x 73	9 290	253	8.6	254	14.2	184	35	23	19	113	895	110	38.9	306	64.5	990	464			
250 x 200	W250 x 67	8 580	257	8.9	204	15.7	185	36	23	19	103	805	110	22.2	218	51.1	900	333			
	W250 x 58	7 420	252	8.0	203	13.5	184	34	23	19	87.0	690	108	18.7	185	50.3	767	282			
	W250 x 49.1	6 260	247	7.4	202	11.0	184	32	23	19	71.2	574	106	15.2	151	49.3	636	229			
250 x 150	W250 x 44.8	5 700	266	7.6	148	13.0	220	23	12	8.5	70.8	531	111	6.95	94.2	34.8	600	145			
	W250 x 38.5	4 910	262	6.6	147	11.2	220	21	12	8.5	59.9	457	110	5.87	80.1	34.5	513	123			
	W250 x 32.7	4 190	258	6.1	146	9.1	220	19	12	8.5	49.1	380	108	4.75	65.1	33.8	426	100			


W8

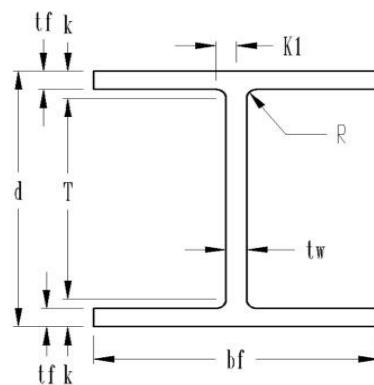

Prime Section Group	Section Size	Area	Depth	Web Thick- ness	Flange		Distance			Fillet Radius	Elastic Properties						Plastic Modulus	
					Width	Thickness					I_x	S_x	r_x	I_y	S_y	r_y	Z_x	Z_y
		Inch x lbs/ft	Inch ²	Inch	Inch	Inch	T	k	k_l		Inch ⁴	Inch ³	Inch	Inch ⁴	Inch ³	Inch	Inch ³	Inch ³
		Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch		Inch	Inch ³	Inch	Inch	Inch ³	Inch	Inch ³	Inch ³
8 x 8	W8 x 67	19.7	9.00	0.570	8.280	0.935	5.981	1.510	0.797	0.51	272	60.4	3.72	88.6	21.4	2.12	70.1	32.7
	W8 x 58	17.1	8.75	0.510	8.220	0.810	5.981	1.385	0.767	0.51	228	52.0	3.65	75.1	18.3	2.10	59.8	27.9
	W8 x 48	14.1	8.50	0.400	8.110	0.685	5.981	1.260	0.712	0.51	184	43.2	3.61	60.9	15.0	2.08	49.0	22.9
	W8 x 40	11.7	8.25	0.360	8.070	0.560	5.981	1.135	0.692	0.51	146	35.5	3.53	49.1	12.2	2.04	39.8	18.5
	W8 x 35	10.3	8.12	0.310	8.020	0.495	5.981	1.070	0.667	0.51	127	31.2	3.51	42.6	10.6	2.03	34.7	16.1
	W8 x 31	9.13	8.00	0.285	7.995	0.435	5.981	1.010	0.655	0.51	110	27.5	3.47	37.1	9.27	2.02	30.4	14.1
8 x 6-1/2	W8 x 28	8.25	8.06	0.285	6.535	0.465	5.981	1.040	0.655	0.51	98.0	24.3	3.45	21.7	6.63	1.62	27.2	10.1
	W8 x 24	7.08	7.93	0.245	6.495	0.400	5.981	0.975	0.635	0.51	82.7	20.9	3.42	18.3	5.63	1.61	23.1	8.57
8 x 5-1/4	W8 x 21	6.16	8.28	0.250	5.270	0.400	6.575	0.853	0.515	0.39	75.3	18.2	3.49	9.8	3.71	1.26	20.4	5.69
	W8 x 18	5.26	8.14	0.230	5.250	0.330	6.575	0.783	0.505	0.39	61.9	15.2	3.43	8.0	3.04	1.23	17.0	4.66


W200

METRIC

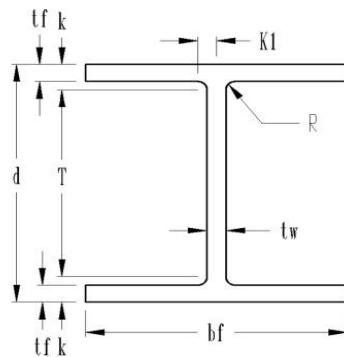

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick- ness t _w	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus				
					Width b _f mm	Thick- ness t _f mm	T mm	k mm	k ₁ mm		X - X			Y - Y							
											I _x 10 ⁶ mm ⁴	S _x 10 ³ mm ³	r _x mm	I _y 10 ⁶ mm ⁴	S _y 10 ³ mm ³	r _y mm					
											113	990	94.5	36.9	351	53.8	1 149	536			
200 x 200	W200 x 100	12 700	229	14.5	210	23.7	153	38	20	13	45.8	451	88.1	15.4	152	51.3	498	231			
	W200 x 86	11 000	222	13.0	209	20.6	152	35	20	13	94.9	852	92.7	31.3	300	53.3	980	457			
	W200 x 71	9 100	216	10.2	206	17.4	152	32	18	13	76.6	708	91.7	25.3	246	52.8	803	375			
	W200 x 59	7 550	210	9.1	205	14.2	153	29	18	13	60.8	582	89.7	20.4	200	51.8	652	303			
	W200 x 52	6 650	206	7.9	204	12.6	152	27	17	13	52.9	511	89.2	17.7	174	51.6	569	264			
	W200 x 46.1	5 890	203	7.2	203	11.0	152	26	17	13	45.8	451	88.1	15.4	152	51.3	498	231			
200 x 170	W200 x 41.7	5 320	205	7.2	166	11.8	152	26	17	13	40.8	398	87.6	9.03	109	41.1	446	166			
	W200 x 35.9	4 570	201	6.2	165	10.2	152	25	16	13	34.4	342	86.9	7.62	92.3	40.9	379	140			
200 x 130	W200 x 31.3	3 970	210	6.4	134	10.2	167	22	13	10	31.3	298	88.6	4.07	61	32.0	334	93			
	W200 x 26.6	3 390	207	5.8	133	8.4	167	20	13	10	25.8	249	87.1	3.32	49.8	31.2	279	76			


W6

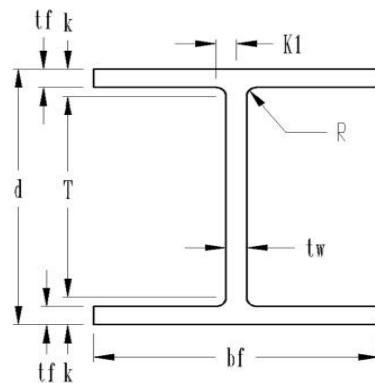

Prime Section Group	Section Size	Area Inch x lbs/ft	Depth Inch	Web Thickness Inch	Flange		Distance			Fillet Radius Inch	Elastic Properties					Plastic Modulus			
					Width Inch	Thickness Inch	T In	k In	k ₁ In		I _x Inch ⁴	S _x Inch ³	r _x Inch	I _y Inch ⁴	S _y Inch ³	r _y Inch	Z _x Inch ³	Z _y Inch ³	
											T In	k In	k ₁ In	R Inch					
					b _f Inch	t _f Inch	T In	k In	k ₁ In										
6 x 6	W6x25	7.34	6.38	0.320	6.080	0.455	4.725	0.828	0.470	0.31	53.6	16.80	2.70	17.10	5.61	1.52	19.0	8.57	
	W6x20	5.87	6.20	0.260	6.020	0.365	4.725	0.738	0.440	0.31	41.5	13.40	2.66	13.30	4.41	1.50	15.0	6.72	
	W6x15	4.43	5.99	0.230	5.990	0.260	4.725	0.633	0.425	0.31	29.3	9.77	2.56	9.32	3.11	1.45	10.8	4.75	


W150

METRIC

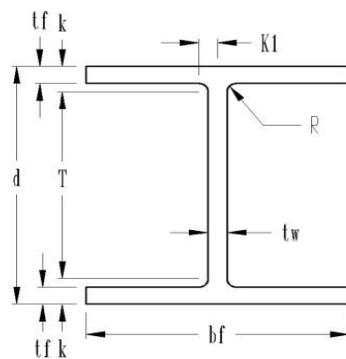


Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick- ness tw	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus				
					Width bf mm	Thick- ness tf mm	T mm	k mm	k1 mm		X - X			Y - Y							
											I _x 10^6 mm^4	S _x 10^3 mm^3	r _x mm	I _y 10^6 mm^4	S _y 10^3 mm^3	r _y mm					
150 x 150	W150x37.1	4 740	162	8.1	154	11.6	120	21	12	8	22	275	68.6	7.1	92	38.6	311	140			
	W150x29.8	3 790	157	6.6	153	9.3	119	19	11	8	17.3	220	67.6	5.5	72	38.1	246	110			
	W150x22.5	2 860	152	5.8	152	6.6	120	16	11	8	12.2	160	65.0	3.9	51	36.8	177	78			

S

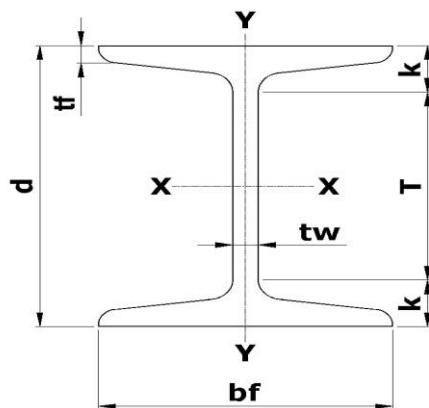


Prime Section Group	Section Size	Area	Depth	Web Thick-ness	Flange		Distance		Fillet Radius	Elastic Properties						Plastic Modulus	
					Width	Thickness				I_x	S_x	r_x	I_y	S_y	r_y		
					Inch	Inch	Inch	Inch		Inch ⁴	Inch ³	Inch	Inch ⁴	Inch ³	Inch	Z_x	Z_y
					Inch x lbs/ft	Inch ²	Inch	Inch		Inch	Inch ³	Inch	Inch	Inch ³	Inch	Inch ³	Inch ³
24 x 8	S24 x 121	35.6	24.50	0.800	8.050	1.090	20.695	1.903	0.750	3160	258.0	9.43	83.0	20.6	1.53	306.0	36.3
	S24 x 106	31.2	24.50	0.620	7.870	1.090	20.695	1.903	0.750	2940	240.0	9.71	76.8	19.5	1.57	279.0	33.4
24 x 7	S24 x 100	29.3	24.00	0.745	7.245	0.870	20.635	1.683	0.750	2380	199.0	9.01	47.4	13.1	1.27	239.0	24.0
	S24 x 90	26.5	24.00	0.625	7.125	0.870	20.635	1.683	0.750	2250	187.0	9.21	44.7	12.5	1.30	222.0	22.4
	S24 x 80	23.5	24.00	0.500	7.000	0.870	20.635	1.683	0.750	2100	175.0	9.47	42.0	12.0	1.34	204.0	20.8
20 x 7	S20 x 96	28.2	20.30	0.800	7.200	0.920	16.835	1.733	0.750	1670	165.0	7.71	49.9	13.90	1.33	198.0	24.9
	S20 x 86	25.3	20.30	0.660	7.060	0.920	16.835	1.733	0.750	1570	155.0	7.89	46.6	13.20	1.36	183.0	23.1
20 x 6	S20 x 75	22.0	20.00	0.635	6.385	0.795	16.785	1.608	0.750	1280	128.0	7.62	29.5	9.25	1.16	152.0	16.7
	S20 x 66	19.4	20.00	0.505	6.255	0.795	16.785	1.608	0.750	1190	119.0	7.83	27.5	8.78	1.19	139.0	15.40
18 x 6	S18 x 70	20.6	18.00	0.711	6.251	0.691	15.367	1.317	0.563	923	103.0	6.70	24.0	7.69	1.08	124.0	14.3
	S18 x 54.7	16.1	18.00	0.461	6.001	0.691	15.367	1.317	0.563	801	89.0	7.07	20.7	6.91	1.14	104.0	12.1
15 x 5.5	S15 x 50	14.7	15.00	0.550	5.640	0.622	12.631	1.185	0.500	485	64.7	5.75	15.6	5.53	1.03	77.0	9.99
	S15 x 42.9	12.6	15.00	0.411	5.501	0.622	12.631	1.185	0.500	446	59.4	5.95	14.3	5.19	1.06	69.2	9.08
12 x 5.5	S12 x 50	14.7	12.00	0.687	5.477	0.659	9.431	1.285	0.563	303	50.6	4.55	15.6	5.69	1.03	60.9	10.3
	S12 x 40.8	12.0	12.00	0.462	5.252	0.659	9.431	1.285	0.563	270	45.1	4.76	13.5	5.13	1.06	52.7	8.86
12 x 5	S12 x 35	10.3	12.00	0.428	5.078	0.544	9.911	1.045	0.438	228	38.1	4.72	9.84	3.88	0.98	44.6	6.8
	S12 x 31.8	9.35	12.00	0.350	5.000	0.544	9.911	1.045	0.438	217	36.2	4.83	9.33	3.73	1.00	41.8	6.44

S
METRIC

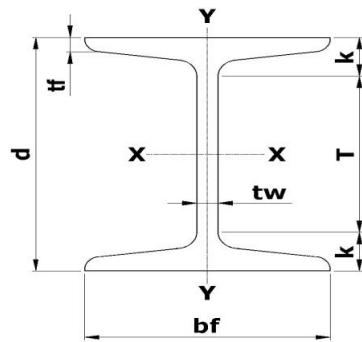

Prime Section Group	Section Size	Area mm²	Depth mm	Web Thick- ness	Flange		Distance		Fillet Radius mm	Elastic Properties						Plastic Modulus	
					Width mm	Thick- ness mm				b_f mm	t_f mm	T mm	k mm	I_x 10⁶ mm⁴	S_x 10³ mm³	r_x mm	I_y 10⁶ mm⁴
					P	t_f	t_w	R		X - X	Y - Y	Z_x	Z_y	10³ mm³	10³ mm³	10³ mm³	10³ mm³
610 x 200	S610 x 180	23 000	622	20.3	204	27.7	528	46.8	19	1315	4228	240	34.5	337.6	38.9	5014	595
	S610 x 158	20 100	622	15.7	200	27.7	528	46.8	19	1224	3933	247	32.0	319.5	39.9	4572	547
610 x 180	S610 x 149	18 900	610	18.9	184	22.1	528	41.2	19	991	3261	229	19.7	214.7	32.3	3916	393
	S610 x 134	17 100	610	15.9	181	22.1	528	41.2	19	937	3064	234	18.6	204.8	33.0	3638	367
	S610 x 119	15 200	610	12.7	178	22.1	528	41.2	19	874	2868	241	17.5	196.6	34.0	3343	341
510 x 180	S510 x 143	18 200	516	20.3	183	23.4	431	42.5	19	695	2704	196	20.8	227.8	33.8	3245	408
	S510 x 128	16 300	516	16.8	179	23.4	431	42.5	19	653	2540	200	19.4	216.3	34.5	2999	379
510 x 150	S510 x 112	14 200	508	16.1	162	20.2	429	39.3	19	533	2098	194	12.3	151.6	29.5	2491	274
	S510 x 98	12 500	508	12.8	159	20.2	429	39.3	19	495	1950	199	11.4	143.9	30.2	2278	252
460 x 150	S460 x 104	13 300	457	18.1	159	17.6	394	31.7	14	384	1688	170	10.0	126.0	27.4	2032	234
	S460 x 81.4	10 400	457	11.7	152	17.6	394	31.7	14	333	1458	180	9.0	113.2	29.0	1704	198
380 x 140	S380 x 74	9 480	381	14.0	143	15.8	323	28.9	13	202	1060	146	6.5	90.6	26.2	1262	164
	S380 x 64	8 130	381	10.4	140	15.8	323	28.9	13	186	973	151	6.0	85.0	26.9	1134	149
310 x 140	S310 x 74	9 480	305	17.4	139	16.7	243	30.8	14	126	829	116	6.5	93.2	26.2	998	169
	S310 x 60.7	7 740	305	11.7	133	16.7	243	30.8	14	112	739	121	5.6	84.1	26.9	864	145
310 x 130	S310 x 52	6 650	305	10.9	129	13.8	255	24.9	11	95	624	120	4.1	63.6	24.9	731	111
	S310 x 47.3	6 030	305	8.9	127	13.8	255	24.9	11	90	593	123	3.9	61.1	25.4	685	106


C

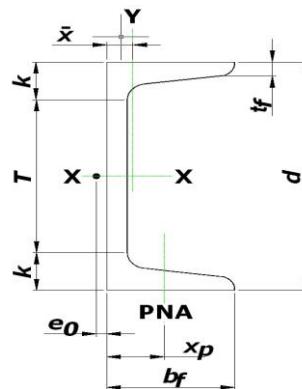

Prime Section Group	Section Size	Area	Depth	Flange		Distance			Radius	Elastic Properties					Plastic Modulus			
				Width	Thickness					I_x	S_x	r_x	I_y	S_y	r_y			
		Inch x lbs/ft	Inch ²	Inch	Inch	Inch	Inch	Inch		Inch ⁴	Inch ³	Inch	Inch ⁴	Inch ³	Inch	Inch ³	Inch ³	
15 x 3 3/8	C15 x 50.0	14.7	15.00	0.716	3.716	0.650	12.575	1.213	0.858	0.50	404	53.8	5.24	11.0	3.77	0.865	68.5	8.14
	C15 x 40.0	11.8	15.00	0.520	3.520	0.650	12.575	1.213	0.760	0.50	348	46.5	5.45	9.2	3.34	0.883	57.5	6.84
	C15 x 33.9	9.96	15.00	0.400	3.400	0.650	12.575	1.213	0.700	0.50	315	42.0	5.62	8.1	3.09	0.901	50.8	6.19
12 x 3	C12 x 30.0	8.82	12.00	0.510	3.170	0.501	10.123	0.939	0.630	0.375	162	27.0	4.29	5.1	2.05	0.762	33.8	4.32
	C12 x 25.0	7.35	12.00	0.387	3.047	0.501	10.123	0.939	0.569	0.375	144	24.0	4.43	4.5	1.87	0.779	29.4	3.82
	C12 x 20.7	6.09	12.00	0.282	2.942	0.501	10.123	0.939	0.516	0.375	129	21.5	4.61	3.9	1.72	0.797	25.6	3.47

C


METRIC

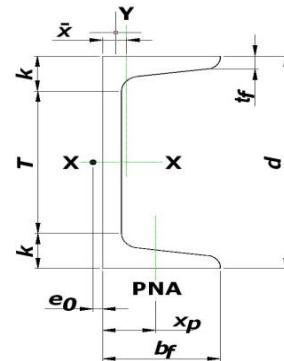

Prime Section Group	Section Size	Area	Depth	Web Thick-ness	Flange		Distance			Radius	Elastic Properties						Plastic Modulus			
					Width	Thick-ness	T	k	k ₁		R	X - X			Y - Y					
							t _w	b _f	10 ⁶ mm ⁴	S _x	r _x	I _y	S _y	r _y	Z _x	Z _y				
mm x kg/m	mm ²	mm	mm	mm	mm	mm	mm	mm	mm	mm	10 ⁶ mm ⁴	10 ³ mm ³	mm	10 ⁶ mm ⁴	10 ³ mm ³	mm	10 ³ mm ³	10 ³ mm ³		
380 x 85	C380 x 74	9 480	381	18.2	94	16.5	319	31	22	13	168	882	133.1	4.6	62	22.0	1 123	133		
	C380 x 60	7 610	381	13.2	89	16.5	319	31	20	13	144.8	762	138.4	3.8	55	22.4	942	112		
	C380 x 50.4	6 430	381	10.2	86	16.5	319	31	18	13	131.1	688	142.7	3.4	51	22.9	832	101		
310 x 75	C310 x 45	5 690	305	13.0	80	12.7	257	24	17	10	67.4	442	109.0	2.1	34	19.4	554	71		
	C310 x 37	4 740	305	9.8	77	12.7	257	24	15	10	59.9	393	112.5	1.9	31	19.8	482	63		
	C310 x 30.8	3 930	305	7.2	74	12.7	257	24	14	10	53.7	352	117.1	1.6	28	20.2	420	57		


M C

METRIC

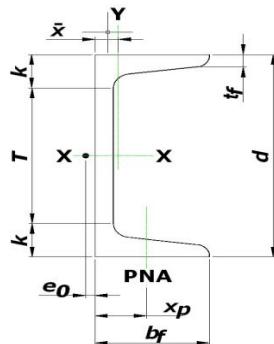

Prime Section Group	Section Size	Area mm x kg/m	Depth mm	Web Thick-ness t_w mm	Flange		Distance			Fillet Radius R mm	Elastic Properties						Plastic Modulus	
					Width b_f mm	Thick-ness t_f mm					I_x 10^6 mm^4	S_x 10^3 mm^3	r_x mm	I_y 10^6 mm^4	S_y 10^3 mm^3	r_y mm	Z_x 10^3 mm^3	Z_y 10^3 mm^3
					t_w mm	t_f mm	T mm	k mm	k_l mm		X - X		Y - Y					
					mm	mm	mm	mm	mm		10^6 mm^4	10^3 mm^3	mm	10^6 mm^4	10^3 mm^3	mm	10^3 mm^3	10^3 mm^3
460 x 100	MC460 x 86	11 000	457	17.8	107	15.9	390	33	25	16	281	1 229	159.8	7.3	87	25.9	1 563	175
	MC460 x 77.2	9 870	457	15.2	104	15.9	390	33	24		261	1 141	162.8	6.8	82	26.2	1 431	162
	MC460 x 68.2	8 710	457	12.7	102	15.9	390	33	22		241	1 052	166.4	6.2	78	26.7	1 298	150
	MC460 x 63.5	8 130	457	11.4	100	15.9	390	33	22		231	1 008	168.7	6.0	76	27.2	1 231	145
330 x 100	MC330 x 74	9 480	330	20.0	112	15.5	270	30	23	13	131	791	117.3	6.8	78	26.9	996	167
	MC330 x 60	7 610	330	14.2	106	15.5	270	30	20		114	687	122.4	5.7	69	27.4	839	142
	MC330 x 52	6 640	330	11.4	103	15.5	270	30	19		105	636	125.7	5.1	65	27.7	762	132
	MC330 x 47.3	6 030	330	9.5	102	15.5	270	30	18		99	601	128.3	4.7	62	27.9	711	126
310 x 100	MC310 x 74	9 480	305	21.2	105	17.8	240	32	24	13	112	736	108.7	7.2	92	27.7	926	179
	MC310 x 67	8 502	305	18.0	102	17.8	240	32	22		104	687	110.7	6.6	87	27.7	852	166
	MC310 x 60	7 610	305	15.0	98	17.8	240	32	21		97	639	113.3	5.9	82	27.9	782	153
	MC310 x 52	6 620	305	11.8	96	17.8	240	32	19		90	590	116.6	5.2	76	28.2	708	141
	MC310 x 46	5 890	305	9.4	93	17.8	240	32	18		84	552	119.6	4.7	72	28.2	651	134

**Hot Rolled Steel Sheet Piling
PZ Sheet Piling**

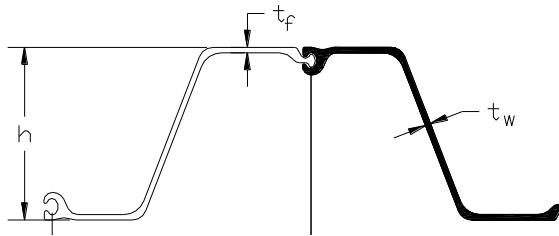

Section	Width (w)	Height (h)	Thickness		Area	Weight		Section Modulus	Coating Area	
			Flange (t _f)	Web (t _w)		Pile	Wall		Both Sides	Wall Surface
	in (mm)	in (mm)	in (mm)	in (mm)	in ² /ft (cm ² /m)	lb/ft (kg/m)	lb/ft ² (kg/m ²)		ft ² /ft of single (m ² /m)	ft ² /ft ² (m ² /m ²)
PZ 22	22.0 559	9.0 229	0.375 9.53	0.375 9.53	6.47 136.9	40.3 60.0	22.0 107.4	18.1 973	84.38 11500	4.48 1.37
										1.22
PZ 27	18.0 457	12.0 305	0.375 9.53	0.375 9.53	7.94 168.1	40.5 60.3	27.0 131.8	30.2 1620	184.20 25200	4.48 1.37
										1.49
PZ 35	22.64 575	14.90 378.5	.600 15.24	.500 12.70	10.29 217.9	66.0 98.3	35 52.1	48.5 2604.5	361.2 49227.2	5.37 164.2
										1.42
PZ 40	19.69 500	16.10 408.9	.600 15.24	.500 12.70	11.76 249	65.6 97.7	40 59.6	60.7 3259.6	490.8 66890.2	5.37 164.2
										1.64


Delivery conditions & tolerances according to ASTM A6/ A6M latest revision with the exception of length, which is +4", -0.

Nucor-Yamato Steel guarantees the driving width (w) of the pile will be +/- 2%.

The degree of swing is not specified or guaranteed.

Nucor-Yamato Steel guarantees the sheets will slide to grade.

Flat Sheet Piling (PS)

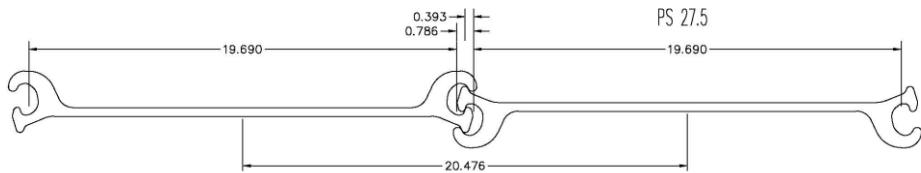

Section ³	Width in (mm)	Web (t _w) (mm)	Minimum Cell Diameter ^{1,2} Ft (m)	Area in ² /ft (cm ² /m)	Weight		Section Modulus	Moment of Inertia in ⁴ /sheet (cm ⁴ /sheet)	Coating Area	
					Pile lb/ft (kg/m)	Wall lb/ft ² (kg/m ²)			Both Sides ft ² /ft of single (m ² /m)	Wall Surface ft ² /ft ² (m ² /m ²)
PS 27.5	19.69	0.4	30	8.09	45.1	27.5	3.3	5.3	3.65	1.11
	500	10.2	9.14	171.2	67.1	134.3	54	221	1.11	1.11
PS 31	19.69	0.5	30	9.12	50.9	31.0	3.3	5.3	3.65	1.11
	500	12.7	9.14	193.0	75.7	151.4	54	221	1.11	1.11

¹ Minimum cell diameter cannot be guaranteed for piles over 65 feet (19.81m) in length

² Minimum cell diameter cannot be guaranteed if piles are spliced

³ Straightness cannot be guaranteed for piles over 65 feet (19.81m) in length

Available Steel Grades

PZ and NZ		PS	
ASTM Grades	Minimum Yield Strength (ksi)	Minimum Yield Strength (ksi)	Minimum Interlock Strength (kips/in)
A 328	39	39	16
A 572 Grade 50	50	50	20
A 572 Grade 60	60	NOT AVAILABLE	
A 588	50	50	20
A 690	50	50	20

Delivery conditions & tolerances according to ASTM A6/ A6M latest revision with the exception of length, which is +4", -0.

Maximum Rolled Lengths (PZ, NZ, & PS)


105 feet on single sheets

NOTE: Interlocking of Nucor-Yamato Steel's PS sections with another producer's section should never be considered. PS and PZ sections should not be interlocked together.

When ordering grades A690 or A572 Grade 60, the order must be placed one rolling cycle in advance of the actual rolling cycle due to special production requirements.

CZ

Special Car Building Shapes

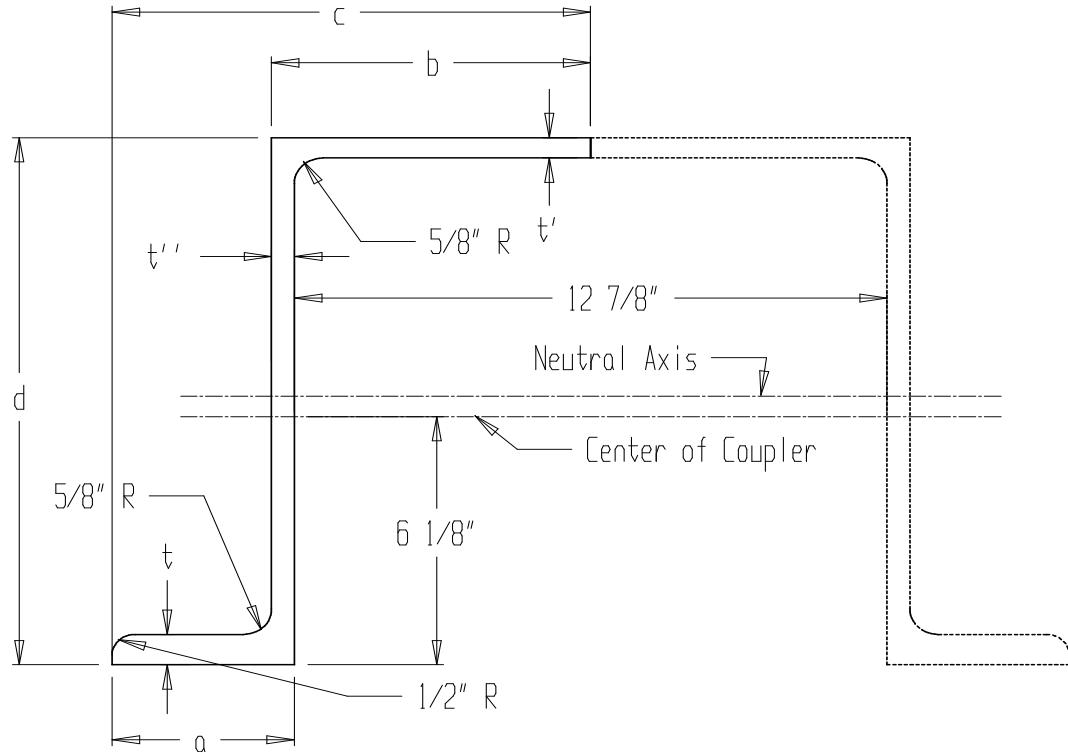


Dimensions and Properties for Designing One shape (as rolled):

Designation and Nominal Size	Weight per Foot	Area of Section	Depth of Section d	Flanges				Width Of Section c	Web Thickness t''
				Width a	Thick ^A t	Width b	Thick ^A t'		
in.	lbs.	in. ²	in.	in.	in.	in.	in.	in.	in.
CZ13 13.063 x 10.625	51.2	15.1	13.063	4.188	0.938	7.031	0.594	10.625	0.594
CZ13 12.938 x 10.5	41.2	12.1	12.938	4.063	0.813	6.906	0.469	10.500	0.469

^AActual flange and web thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.

CZ13 Tolerances

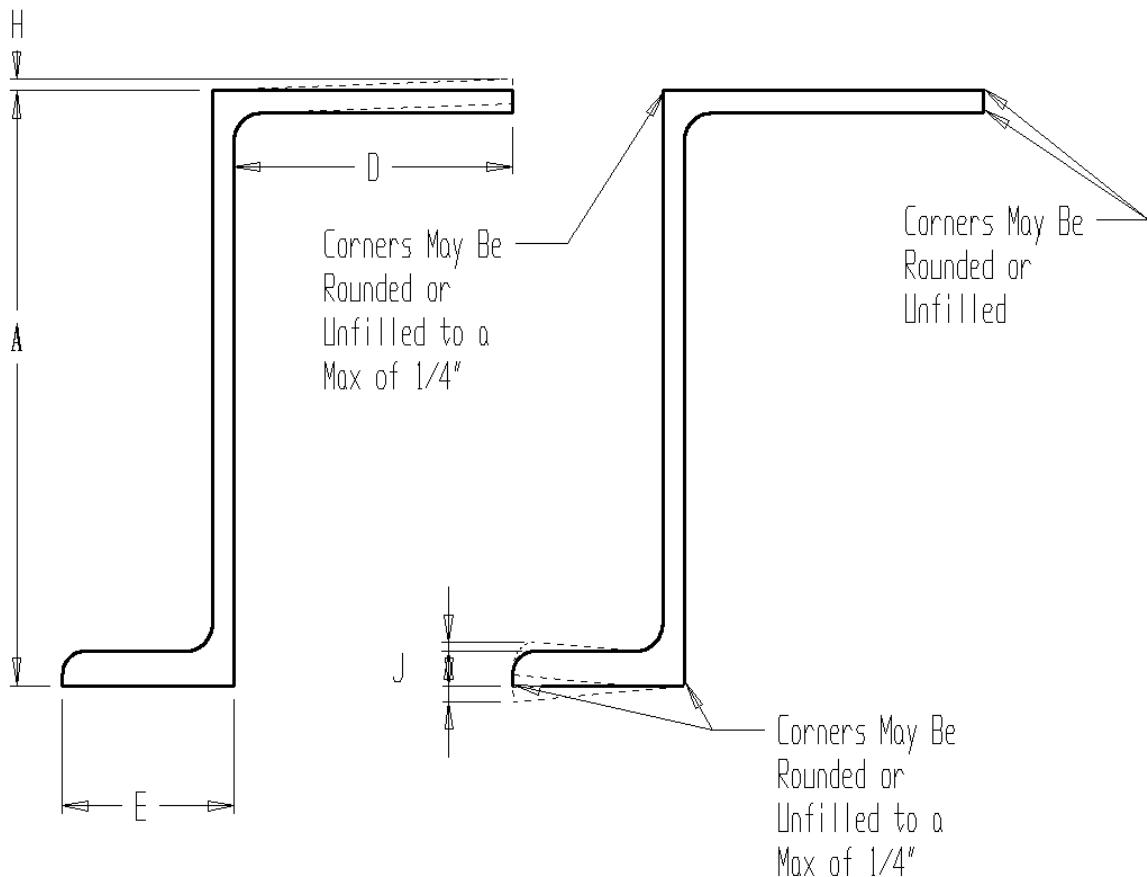

Dimensional Tolerance:

Depth, inches A		Inside Width Long Flange, inches D		Overall Width Short Flange, inches E		Weight (%)		Off-Squareness, Flange to Web		
Over	Under	Over	Under	Over	Under	Over	Under	Long Flange, inches H	Short Flange J	
Over 0.063	Under 0.063	Over 0	Under 0.125	Over 0.156	Under 0.250	Over 2.5	Under 2.5	Up to 0.125	Over 1°	Under 1°

Camber Tolerance:

Camber denotes the curvature from the plane of either flange in the length of the section.

If section is cambered, the camber of the long flange must be high at the center of length, and within limits specified below.

Lengths	Maximum, inches *
Up to 41 foot inclusive	1.25
Over 41 foot to 51 foot inclusive	1.50
Over 51 foot to 66 foot inclusive	2.00
Over 66 foot to 82 foot inclusive	3.00

* Positive camber in overall straightness refers to when the outer face of the long flange is convex over the length of the center sill zee.

Sweep Tolerance:

Sweep denotes the curvature from the plane of the web in the length of the section.

Maximum sweep in either direction = 0.125 inches X number of feet of total length
5